



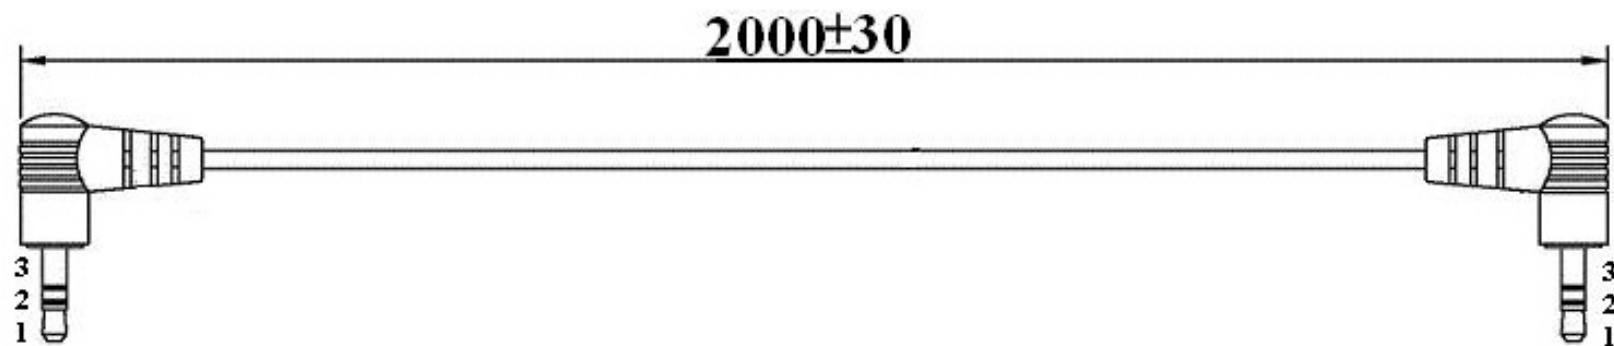

P1.  
ø3.5 STEREO

P2.  
ø3.5 STEREO

### WIRING DIAGRAM

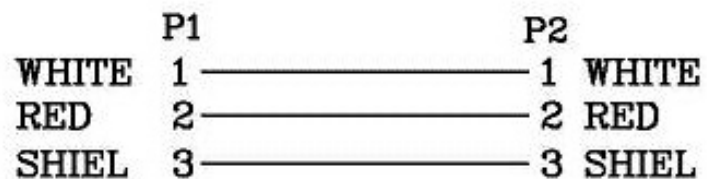

| 2   | CONNECTOR | 2    | PCS   | ø3.5 STEREO                       |
|-----|-----------|------|-------|-----------------------------------|
| 1   | CABLE     | 620  | mm    | UL2547 28AWG 2C+S OD:3.5mm #BLACK |
| NO. | PART NO.  | Q'TY | UNITS | DESCRIPTION                       |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

### ORDER INFORMATION

PNX2-03R03R28-M2M-LF

SERIES

LEADFREE

2000mm

MALE TO MALE

28 AWG

3 PIN 90° TO 3 PIN 90°

DESCRIPTION: