
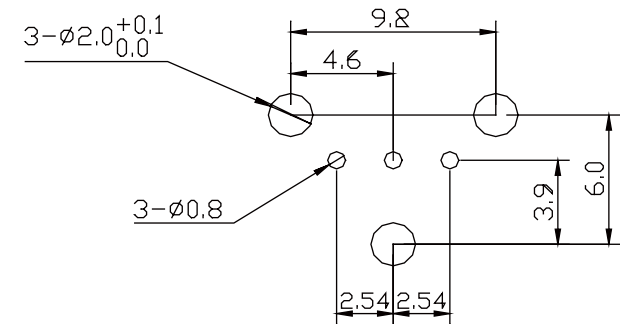


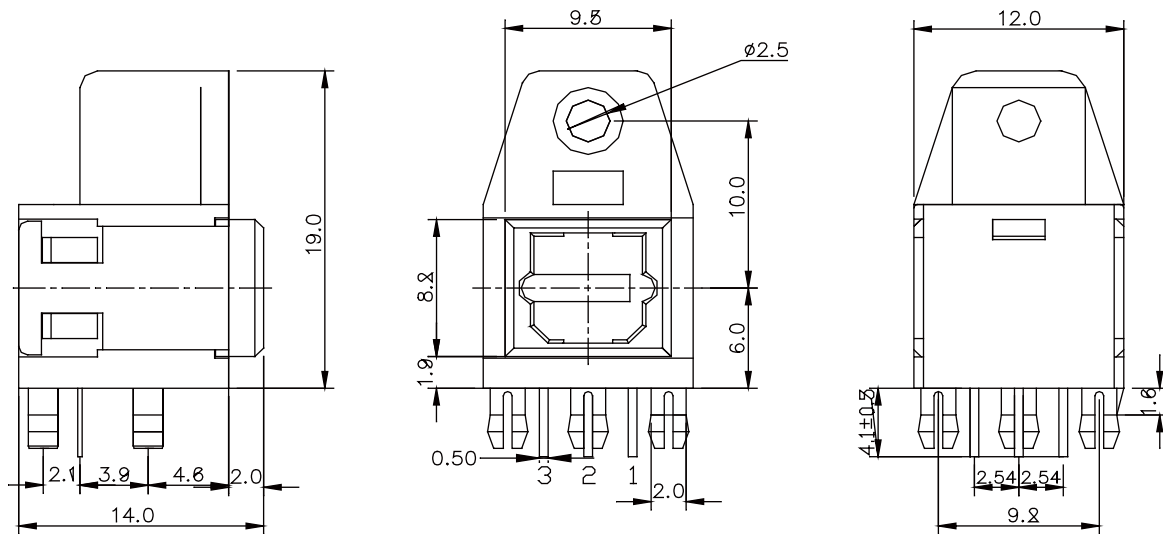

PCB Layout for Electrical Circuit

Notes:

1. All dimensions are in millimeters.
2. General Tolerance: ± 0.1 mm
3. Shutter color: Gray

Device Selection Guide

Table 1. Device selection guide for DLT1130A series.

Chip		Operating Voltage (Vcc)	Dissipation Current(mA)	Fiber Coupling Light Input (dBm)		
IC Material	PD λ p(nm)		Typ.	Min.	Typ.	Max.
Si	650	2.7~5.5	5	-21	-	-15

Pin Function

1. GND
2. Vcc
3. Vin

POF-JRPSH-T03-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. POF-JRPSH-T03

DWG NO. POF-JRPSH-T03

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司