

Notes: 1.All dimensions are in millimeters.
2.General Tolerance:±0.2mm

Pin Function

- 1. Vout
- 2. GND
- 3. Vcc

POF-R3PN-03-LF
LEADFREE

RoHS Compliant

Absolute Maximum Ratings(Ta = 25°C)

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	6	V
Storage Temperature	Tstg	-30 to 80	°C
Operating Temperature	Topr	-20 to 70	°C
Soldering Temperature	Tsol	260*	°C

* Soldering time ≤ 5s / 2 times.



PART NO. POF-R3PN-03

DWG NO. POF-R3PN-03

CHECKED BY CY

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

FILE NO.

DRAWING BY

DESCRIPTION:

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION




AREA

REVISIONS

HK

DATE

PCB Layout For Electrical Circuit

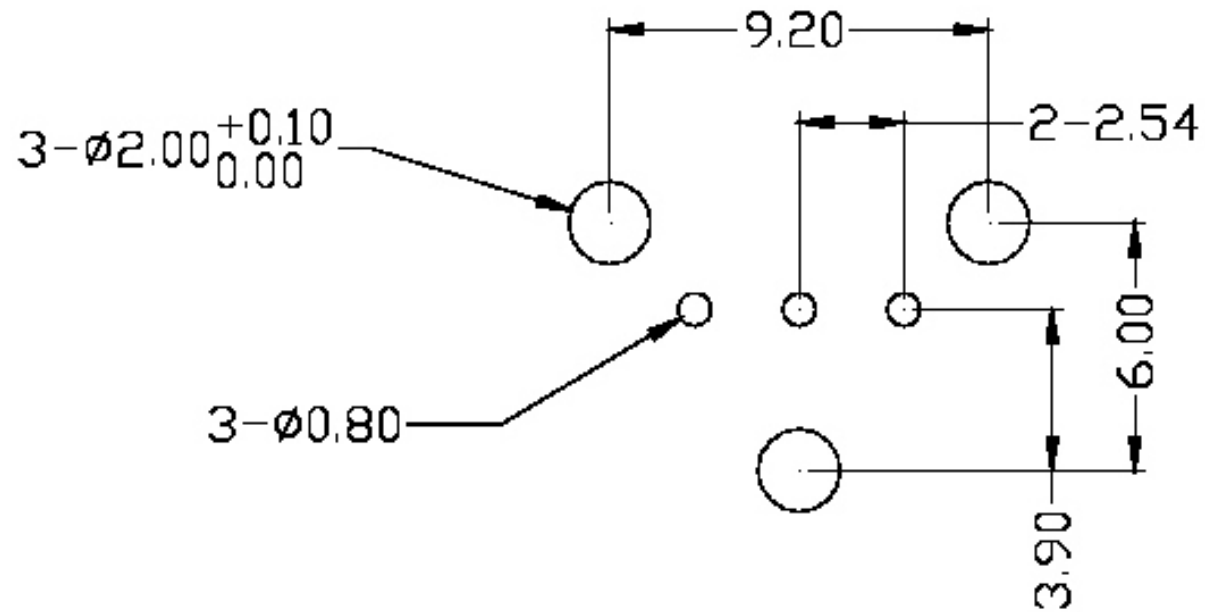

M MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. POF-R3PN-03

DWG NO. POF-R3PN-03

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

