
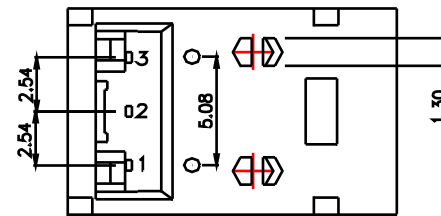

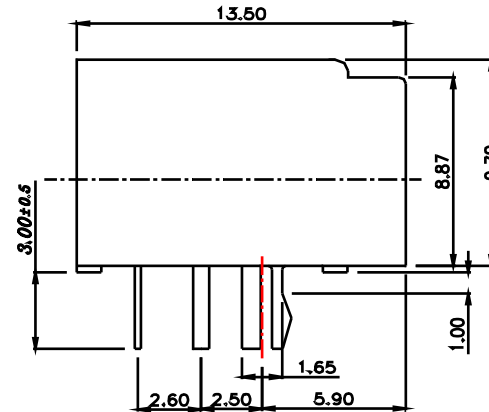


- Notes:**
1. All dimensions are in millimeters.
  2. General Tolerance:  $\pm 0.2\text{mm}$
  3. Black shutter
  4. Material: HTN (High Temperature Nylon)

**Pin Function**

1. GND
2. Vcc
3. Vin

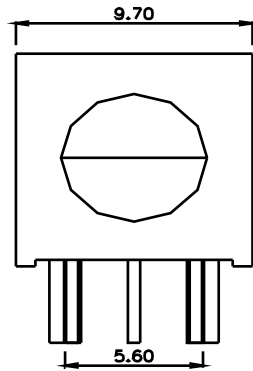

**Absolute Maximum Ratings( Ta = 25°C)**

Parameter	Symbol	Rating	Unit
Supply Voltage	Vcc	-0.5 to 7	V
DC Input Voltage	Vin	-0.5 to Vcc+0.5	V
Power Dissipation	P	120	mW
Storage Temperature	Tstg	-30 to 80	°C
Operating Temperature	Topr	-20 to 70	°C
Soldering Temperature	Tsol	260*	°C

POF-T2S-03-LF  
LEADFREE  
RoHS Compliant



PART NO. POF-T2S-03

DWG NO. POF-T2S-03

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X  $\pm$  0.2

.XX  $\pm$

.XXX  $\pm$

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

焯倫股份有限公司