


positions	view from termination side pin part
2 PIN	
4 PIN	
5 PIN	
6 PIN	
7 PIN	
8 PIN	
9 PIN	
10 PIN	
14 PIN	

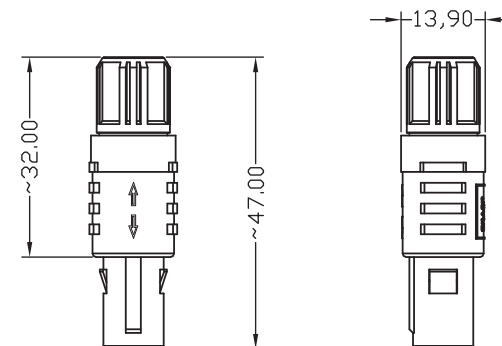

NOTES :

1.MATERIAL

HOUSING : HIGH TEMPERATURE PLASTIC,UL94V-0

INSERT : HIGH TEMPERATURE PLASTIC,UL94V-0

CONTACT : COPPER ALLOY

CABLE COLLET : HIGH TEMPERATURE PLASTIC,UL94V-0

BACK NUT : HIGH TEMPERATURE PLASTIC,UL94V-0

2.NUMBER OF CONTACT : 2 TO 14 POSITION

3.ALL DIMENSIONS ARE IN MILLIMETERS.

4.RoHS DIRECTIVE COMPLANCE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PP9-PAxx-xx-LF

SERIES T T LEADFREE
02~14WAY

MALE BK:BLACK
ASSEMBLY WH:WHITE
RD:RED
YL:YELLOW BL:BLUE
GR:GREEN GE:GREY

DESCRIPTION: