


positions	view from termination side socket part
2 PIN	
4 PIN	
5 PIN	
6 PIN	
7 PIN	
8 PIN	
9 PIN	
10 PIN	
14 PIN	

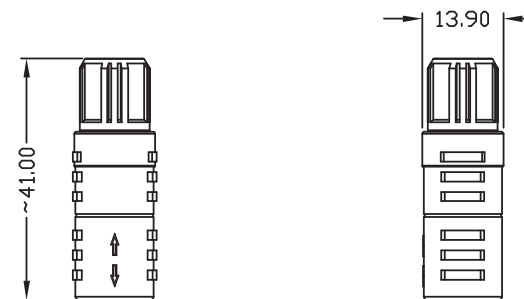

NOTES :

1.MATERIAL

HOUSING : HIGH TEMPERATURE PLASTIC,UL94V-0

INSERT : HIGH TEMPERATURE PLASTIC,UL94V-0

CONTACT : COPPER ALLOY

CABLE COLLET : HIGH TEMPERATURE PLASTIC,UL94V-0

BACK NUT : HIGH TEMPERATURE PLASTIC,UL94V-0

2.NUMBER OF CONTACT : 2 TO 14 POSITION

3.ALL DIMENSIONS ARE IN MILLIMETERS.

4.RoHS DIRECTIVE COMPLANCE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

PP9-SAxx-xx-LF

SERIES | | LEADFREE
02~14WAY

BK:BLACK
WH:WHITE

RD:RED

YL:YELLOW

BL:BLUE
GE:GREY

DESCRIPTION: SNAP LATCH (In-Line-Receptacle)