



Positions	View from termination side Pin part
2 Pin	
3 Pin	
4 Pin	
5 Pin	
6 Pin	
7 Pin	
8 Pin	
9 Pin	
10 Pin	
12 Pin	
14 Pin	

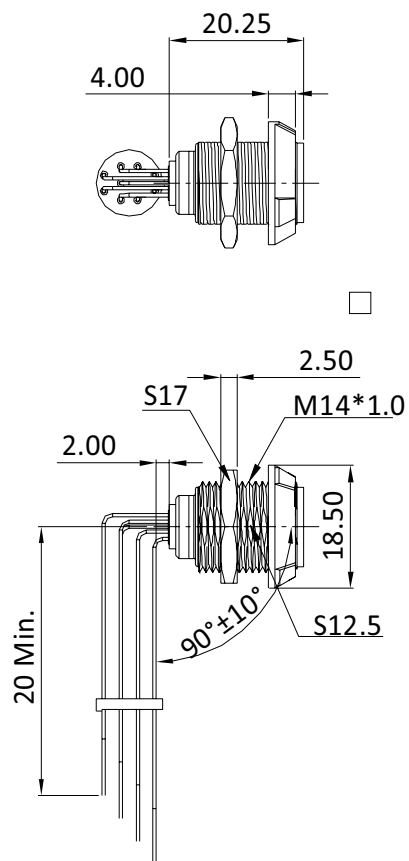

Notes :

1. Material
 - Outer shell : PSU/PEI
 - Insulator : PEEK
 - Contact : copper alloy
 - Hex nut : copper alloy
 - Copper wire : copper alloy
 - Front nut : PSU/PEI
 - Spacer : LCP
2. Number of contact : 2 to 14 position
3. All dimensions are in millimeters.
4. Rohs directive compliance
5. Panel hole

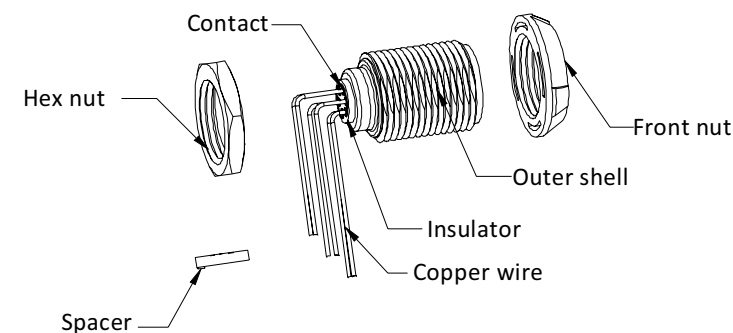

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.50
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PP9-SRPAN-xx-LF
SERIES | | | | LEADFREE
| | | | 02~14WAY
| | | | NUT
| | | | PANEL
| | | | DIP 90°
| | | | FEMALE

DESCRIPTION: SNAP LATCH Receptacle with 90° contacts