




TITLE: SNAP LATCH (STRAIGHT PLUG) TO OPEN

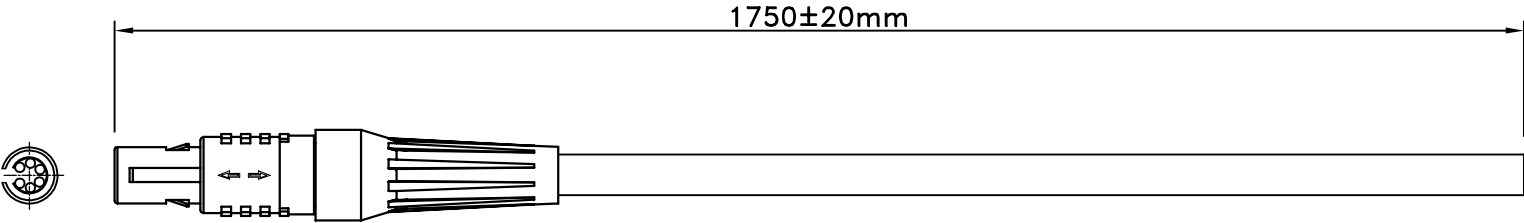


FRONT VIEW 6PIN PLUG




LATERAL VIEW



SHEATH



PIN OUT	
CONN	OPEN
1	BLACK NC
2	BROWN NC
3	RED NC
4	ORANGE NC
5	YELLOW NC
6	GREEN NC

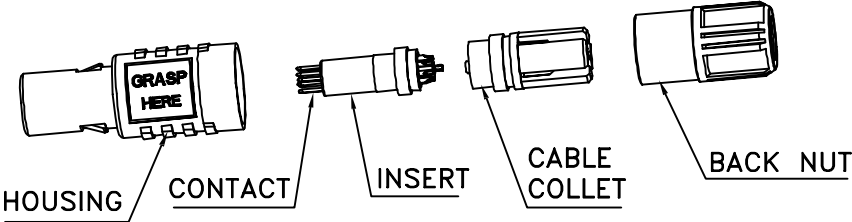

TITLE: SNAP LATCH (STRAIGHT PLUG) TO OPEN

***CONSTRUCTION:

1.CABLE: * UL2464 (6C/26#)+EA OD:5.2mm GRAY COLOR JACKET.

***CONNECTORS:

2.CONN: * MTA 6PIN PLUG SOLDER TYPE.
* HOUSING: HIGH TEMPERATURE PLASTIC,UL94V-0 GRAY COLOR.
* INSERT: HIGH TEMPERATURE PLASTIC,UL94V-0.
* CONTACT: COPPER ALLOY.
* CABLE COLLET: HIGH TEMPERATURE PLASTIC,UL94V-0.
* BACK UNT: HIGH TEMPERATURE PLASTIC,UL94V-0 BLACK COLOR.

3.SHEATH: * MTA
* MATERIAL: SILICON BLACK COLOR.

4.TEST: * CT: 2 Ohm. IS: 5M Ohm.

5.PACKING: * PACK EACH CABLE IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



PART NO. PP9X1-060026BK-M1M75

DWG NO. PP9X1-060026BK-M1M75

CHECKED BY CY

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG

DESCRIPTION:


FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

DATE

煜倫股份有限公司