

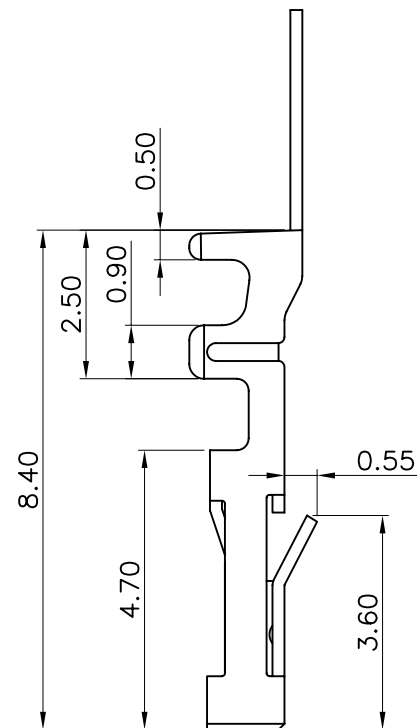
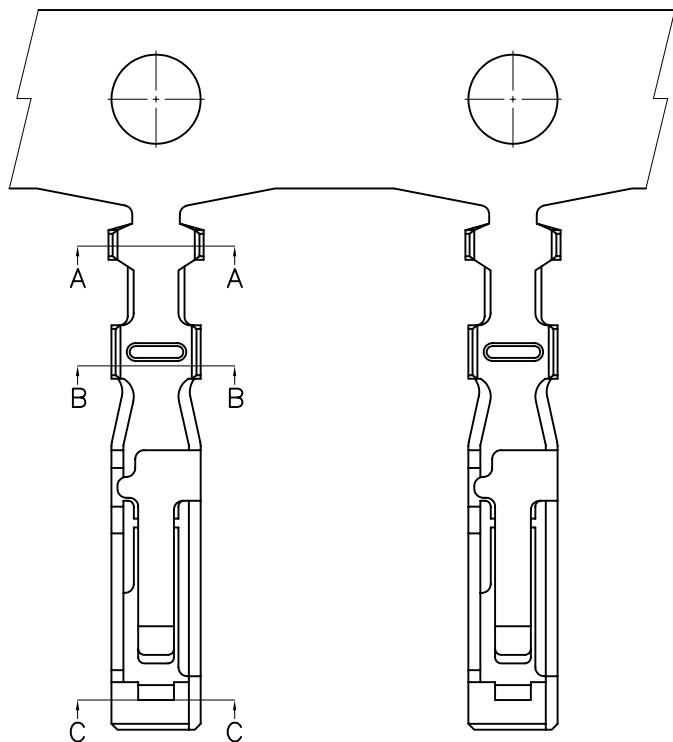


Section A-A



Section B-B



Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.20\text{mm}$
2. FINISH: TIN-PLATFD OVFR NICKFL.
3. APPLICABLE WIRE RANGE: AWG#24~#28
4. INSULATION O.D.: $\varnothing 0.90\sim 1.15\text{mm}$
5. PACKING: 15K/REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

PR-F-24-LF
SERIES | LEADFREE
24~28WAY
FEMALE TERMINAL





DESCRIPTION: WIRE TO WIRE, FEMALE , PITCH 2.00mm, CRIMP TYPE, CONTACT

PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	580*580*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
PR-F-24	15,000PCS/RE	8 RE/BC	120,000 PCS/BC

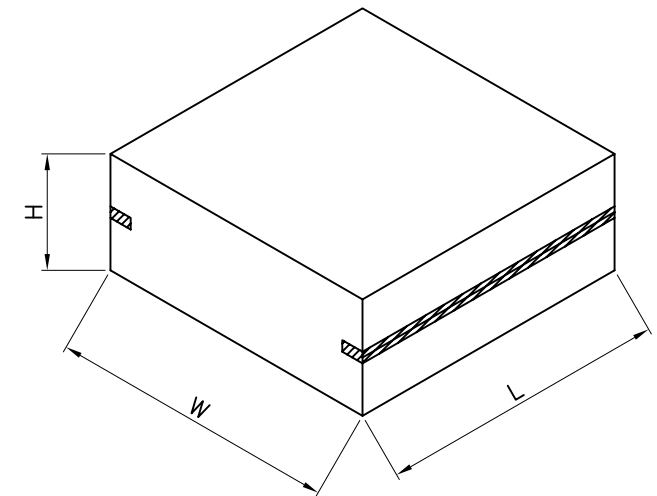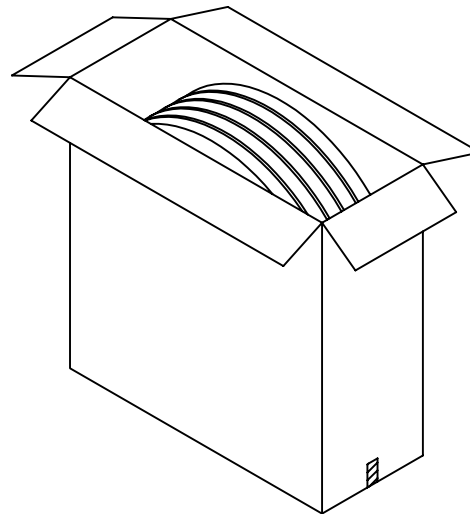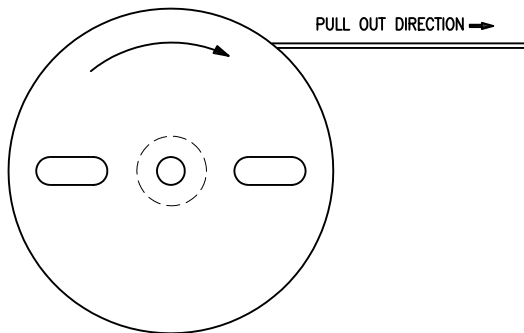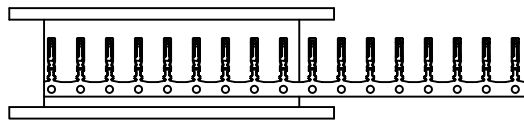

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$

照片框

ORDER INFORMATION

PR-F-24-LF
SERIES | T LEADFREE
24~28WAY
FEMALE TERMINAL

DESCRIPTION: WIRE TO WIRE, FEMALE , PITCH 2.00mm, CRIMP TYPE, CONTACT