







PR-P-02





PR-P-03





PR-P-04





PR-P-05





PR-P-06





PR-P-07

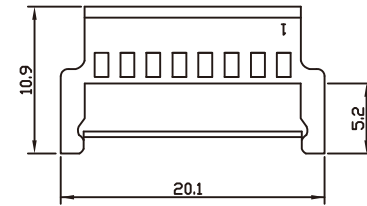


PR-P-08

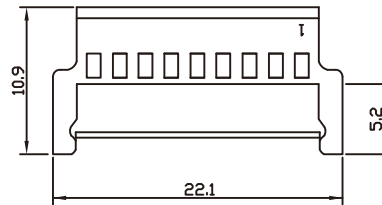

PR-P-09

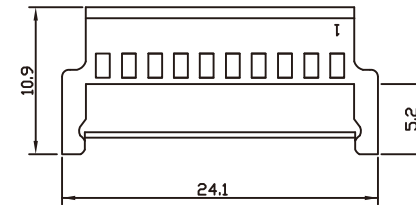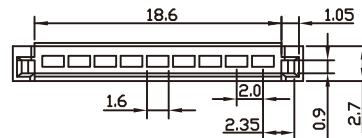

PR-P-10

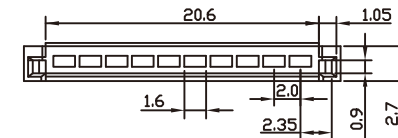

SPECIFICATIONS

Circuit: 2~10
 Voltage rating: 125V AC, DC
 Withstanding voltage: 500V AC/minute
 Insulation resistance: 1000M OHM min
 Temperature range: -25°C ~ +85°C
 Material: UL94V-0 nylon 66

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION



ORDER INFORMATION

PR-P-xx-LF
 SERIES | LEADFREE
 02~10WAY
 MALE HOUSING

DESCRIPTION: