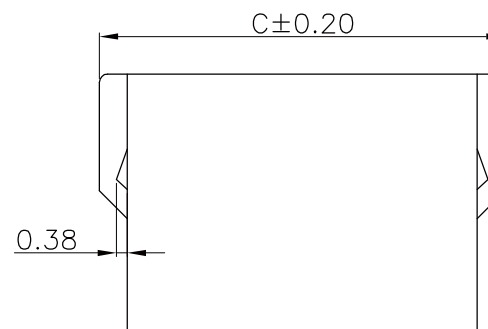
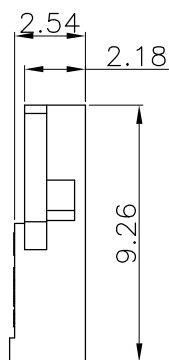
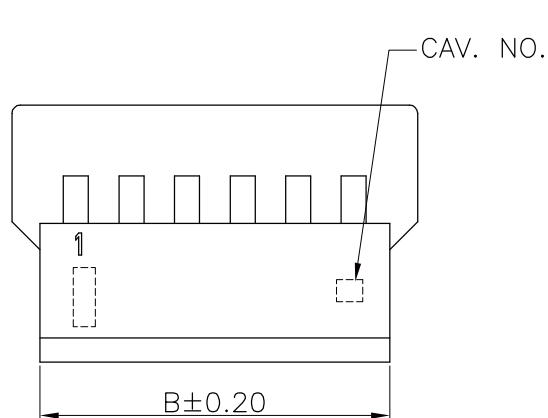
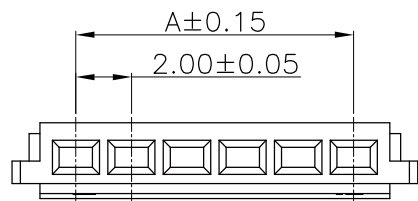


NOTES:

1. MATERIAL:

INSULATION: (HF) NYLON 66, UL94V-0; COLOR: **WHITE**

PIN	DIM. (mm)		
	A	B	C
02	-	4.60	6.60
03	4.00	6.60	8.60
04	6.00	8.60	10.60
05	8.00	10.60	12.60
06	10.00	12.60	14.60
07	12.00	14.60	16.60
08	14.00	16.60	18.60
09	16.00	18.60	20.60
10	18.00	20.60	22.60
11	20.00	22.60	24.60
12	22.00	24.60	26.60
13	24.00	26.60	28.60
14	26.00	28.60	30.60
15	28.00	30.60	32.60
16	30.00	32.60	34.60

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PR-S-xx-LF
SERIES | LEADFREE
02~16WAY
FEMALE HOUSING

DESCRIPTION: