


**SPECIFICATIONS:**


Current rating:5.0A AC,DC  
 Voltage rating:250V AC,DC  
 Contact resistance:20MΩ max  
 Insulation resistance: 1,000MΩ min  
 Withstanding voltage:1,500V AC/minute  
 Temperature range:-25°C to +125°C  
 Application wires:AWG#26 to #18

**MATERIAL:**

Insulator: Nylon 66 UL94V-0  
 Contact: Brass  
 Finish: Tin Plated

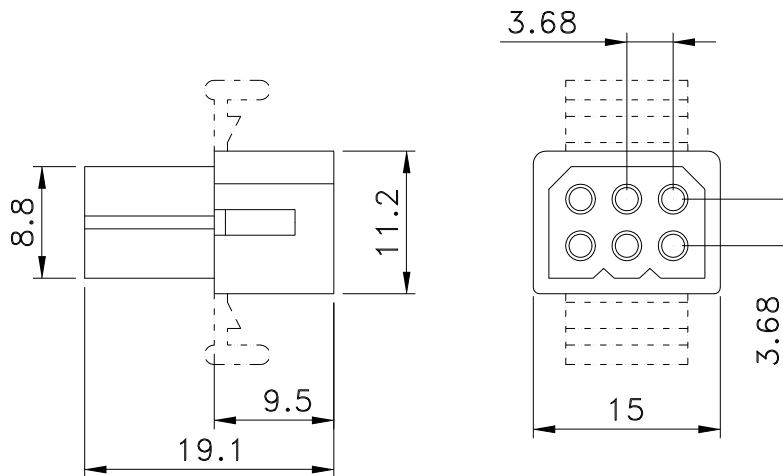

PS-Px-3Xxx-LF  
 LEADFREE  
 RoHS Compliant

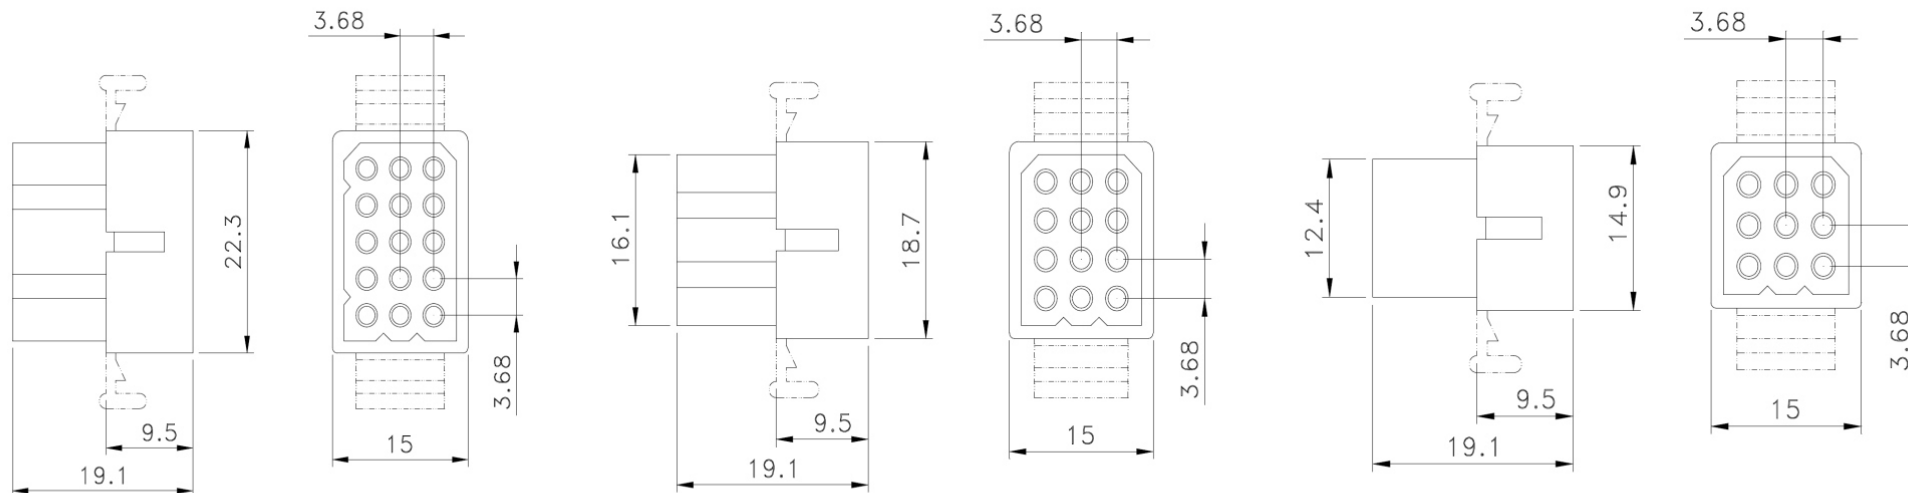

PART NO. PS-Sx-3Xxx		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:			
DWG NO. PS-Sx-3Xxx		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司

UNIT / mm SCALE 1:1