
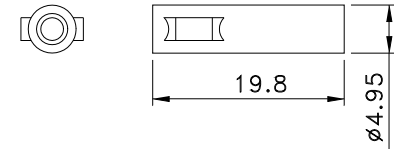
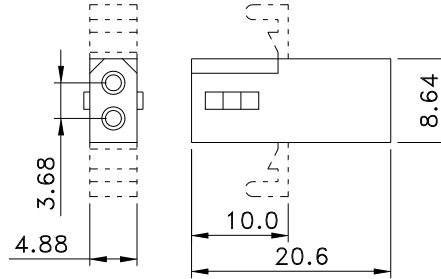


SPECIFICATIONS:

Current rating:5.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20MΩ max
 Insulation resistance: 1,000MΩ min
 Withstanding voltage:1,500V AC/minute
 Temperature range:-25°C to +125°C
 Application wires:AWG#26 to #18



MATERIAL:

Insulator: Nylon 66 UL94V-0
 Contact: Brass
 Finish: Tin Plated

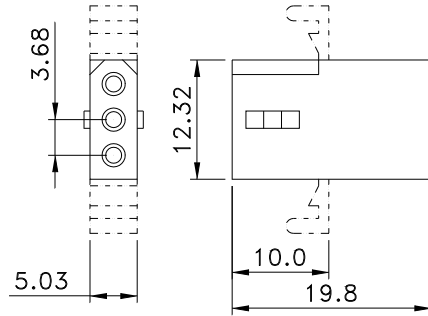

PS-Sx-1Xxx-LF
 LEADFREE
 BLANK:NON/EAR
 E:W/EAR

RoHS Compliant

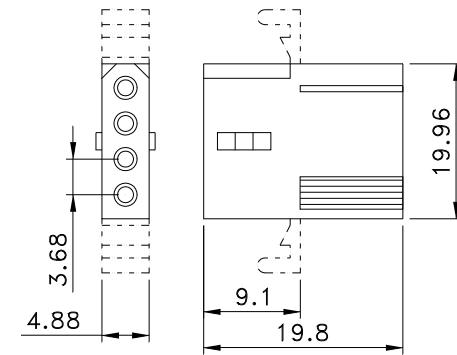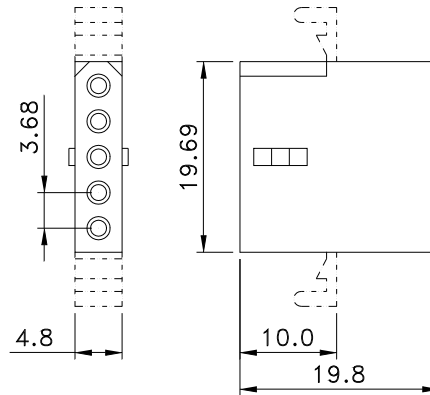

PART NO. PS-Sx-1Xxx

DWG NO. PS-Sx-1Xxx

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

AREA

REVISIONS

HK


DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



--	--	--	--