


SPECIFICATIONS:

Current rating:5.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20MΩ max
 Insulation resistance: 1,000MΩ min
 Withstanding voltage:1,500V AC/minute
 Temperature range:-25°C to +125°C
 Application wires:AWG#26 to #18

MATERIAL:

Insulator: Nylon 66 UL94V-0
 Contact: Brass
 Finish: Tin Plated

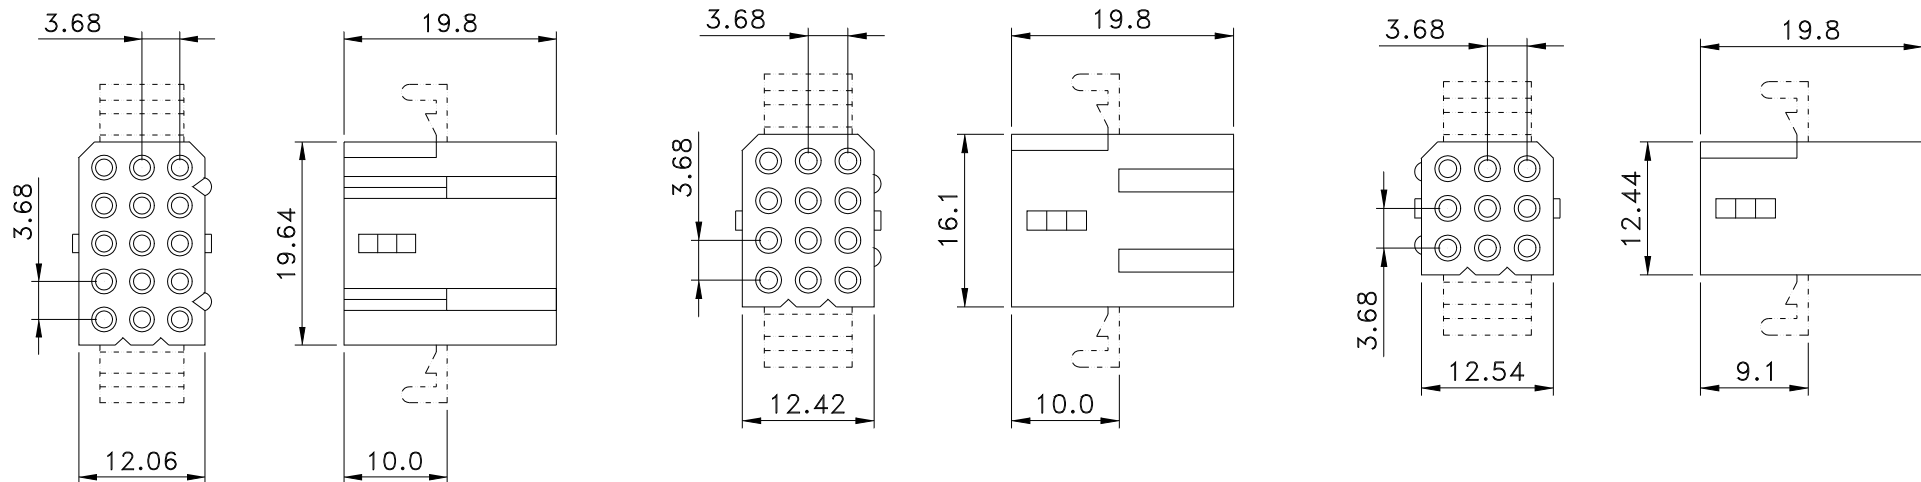

MORE THAN ALL
 CONNECTORS
 ASSEMBLIES

PART NO. PS-Sx-3Xxx

DWG NO. PS-Sx-3Xxx

APPROVED BY CY

TOLERANCES ARE

DESCRIP TION:

FILE NO.

DRAWING BY

X
 .XX
 .XXX
 AWG

AREA

煜倫有限公司

UNIT / mm

SCALE 1:1

PROJECTION

REVISIONS

HK

DATE