
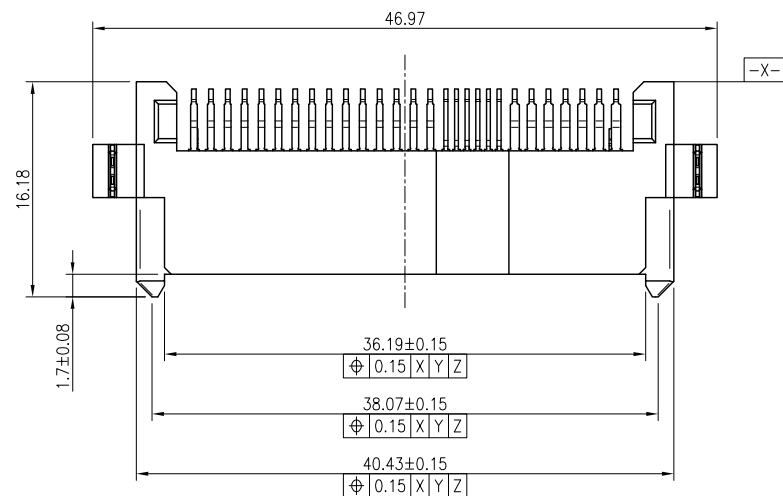
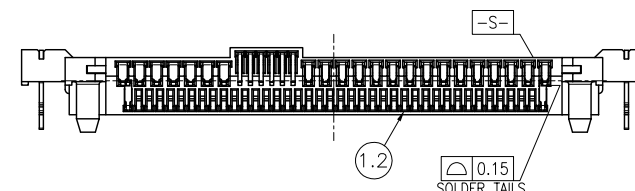
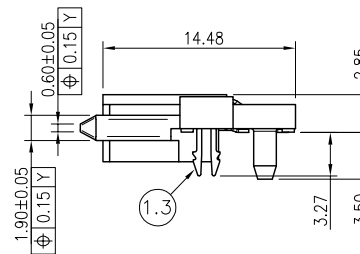


NOTES:

1. MATERIAL:
 - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP.,UL94V-0; COLOR:BLACK.
 - 1.2 CONTACT: COPPER ALLOY
 - 1.3 FIT NAIL: STAINLESS STEEL
2. FINISH:
 - 2.1 CONTACT:
 - GOLD PLATING ON CONTACT AREA.
 - 100~200u" MATTE TIN PLATING ON SOLDER TAILS.
 - 50~100u" NICKEL UNDERPLATING OVERALL.
 - 2.2 FIT NAIL:
 - 100~200u" MATTE TIN PLATING ON SOLDER TAILS.
 - 50~100u" NICKEL UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C ,PER SPEC.

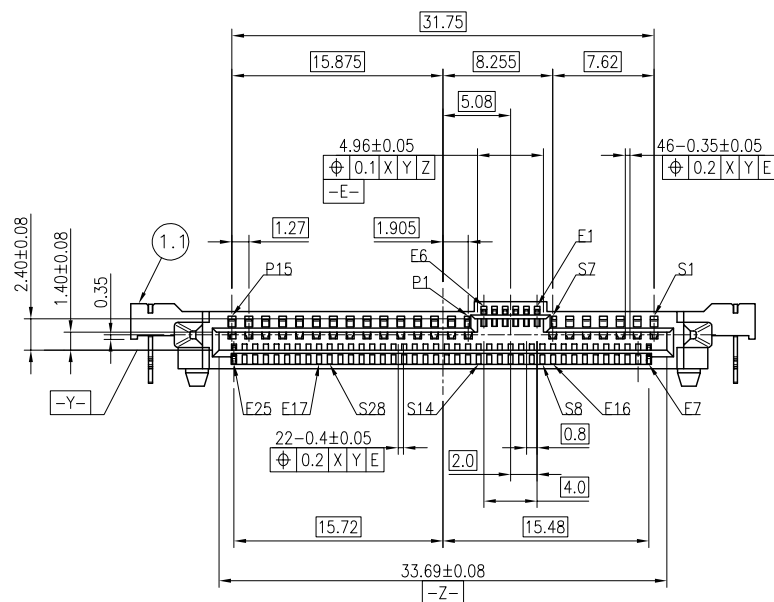

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

PSAS-SWF28ZP2-68-LF

SERIES

LEADFREE

68 WAY



CLIP+POST X 2

OFFSET 2.85mm


90°SMT

FEMALE

DESCRIPTION: 1.27/0.8 PITCH SAS+PCIE 12G RECEPTACLE(RVS) R/A SMT TYPE

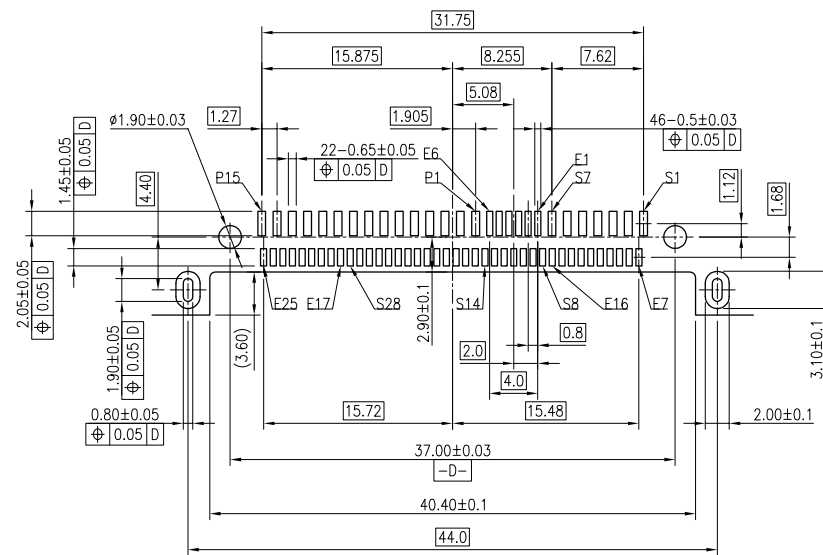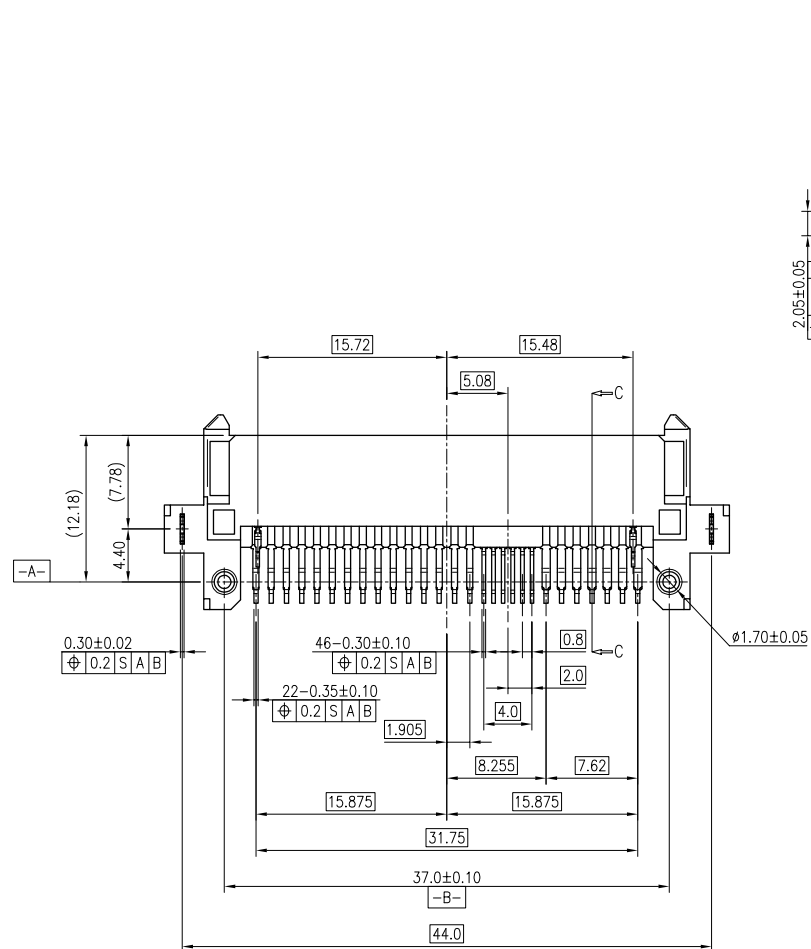

RECOMMENDED P.C.B. LAYOUT

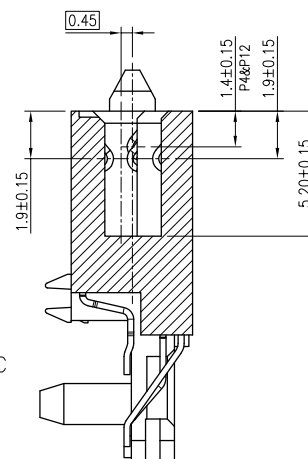

SECTION C-C
SCALE 4:1

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG ± 2°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PSAS-SWF28ZP2-68-LF

SERIES

LEADFREE

68 WAY

CLIP+POST X 2

OFFSET 2.85mm

90°SMT

FEMALE

DESCRIPTION: 1.27/0.8 PITCH SAS+PCIE 12G RECEPTACLE(RVS) R/A SMT TYPE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com