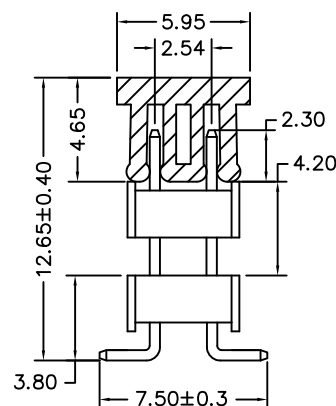
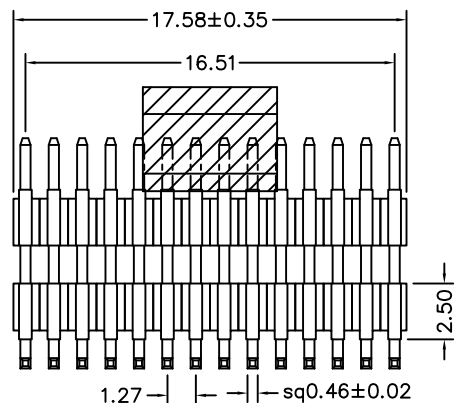
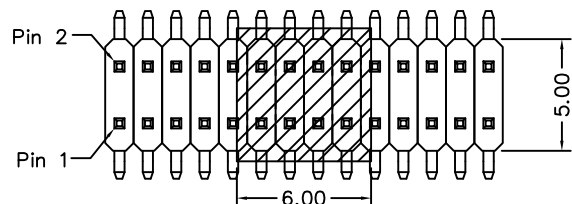


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T UL94-V0

Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

PSB-V80X23C-2X14-LF
SERIES | | | | LEADFREE
| | | | 28 WAY
| | | | CAP
| | | | CONTACT 2.3mm
180°SMT | | | | NON POST
| | | | HIGH 8.0mm

DESCRIPTION: PIN HEADER 1.27*2.54mm SMT S/T TYPE, DUAL ROWS CAP+TAPE REEL