
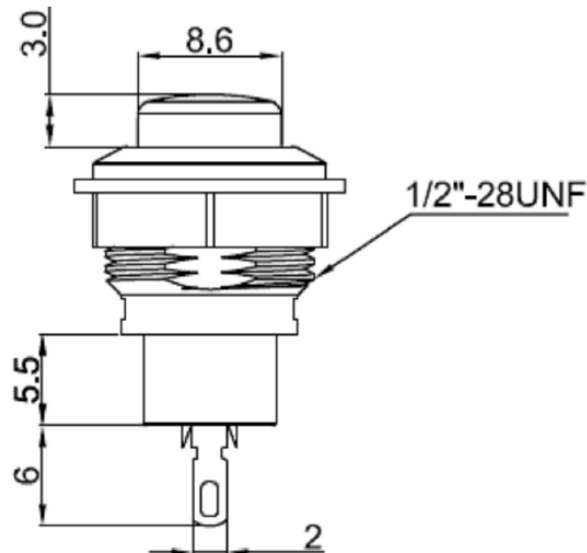
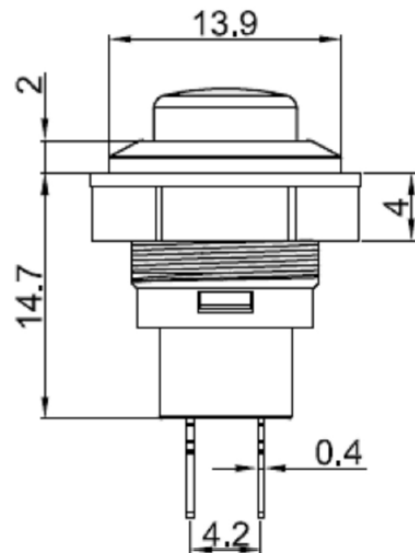
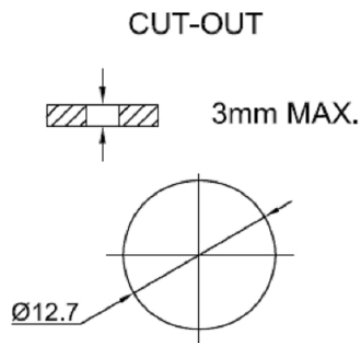


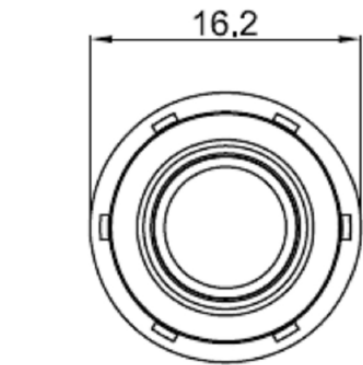

MATERIAL:

Base: PA66, UL rated: 94V-2 Min;
Cap: ABS;
Terminal: Copper, Silver or Tin plated;
Nut: PBT, UL rated: 94V-2 Min.

Rating: 3A 125V AC

1.5A 250V AC

Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC 1000V 1 minute

Operating Force: 250±50g

Travel: 2.0±0.4mm

Mechanical Life: Over 30,000 cycles

Electrical Life: Over 10,000 cycles

Operating Temperature: -20°C ~ +85°C

Soldering Temperature: 256°C for 5 Seconds

Function: OFF-(ON)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ± 0.50
X, ± 0.30
.XX ±
.XXX ±
ANG ± 5°

照片框

ORDER INFORMATION

PSC13-S2PANWBK-02B-LF

SERIES

LEADFREE

02P

PUSH ON

BLACK

NUT+WASHER

PANEL FRONT

2.0mm SOLDER

DESCRIPTION: