



类型	小直键开关		品名	PSW25-RM-03
1. 功能规格				
1.1 额定电压	DC50V	1.6 自由位置 (FP)		
1.2 额定电流	0.3A	1.7 动作位置 (OP)		
1.3 接触电阻 (CR)	≤50mΩ (初始值)	1.8 行程 (PT)	2.5±0.2mm LOCK (S)	
1.4 操作力 (OF)	300±100gf	1.9 全行程 (TT)	3.5±0.2mm FULL (S)	
1.5 回弹力 (RF)				
2. 可靠性参数				
2.1 机械寿命	10,000 CYCLES	2.5 焊接工艺	手工焊、波峰焊	
2.2 电气寿命	10,000 CYCLES	2.6 操作温度	-10℃ ~ +60℃	
2.3 绝缘电阻 (IR)	≥100MΩ DC500V	2.7 储存湿度	<85%RH	
2.4 耐压强度 (WV)	AC250V 1 minute	2.8		

3. 尺寸规格图

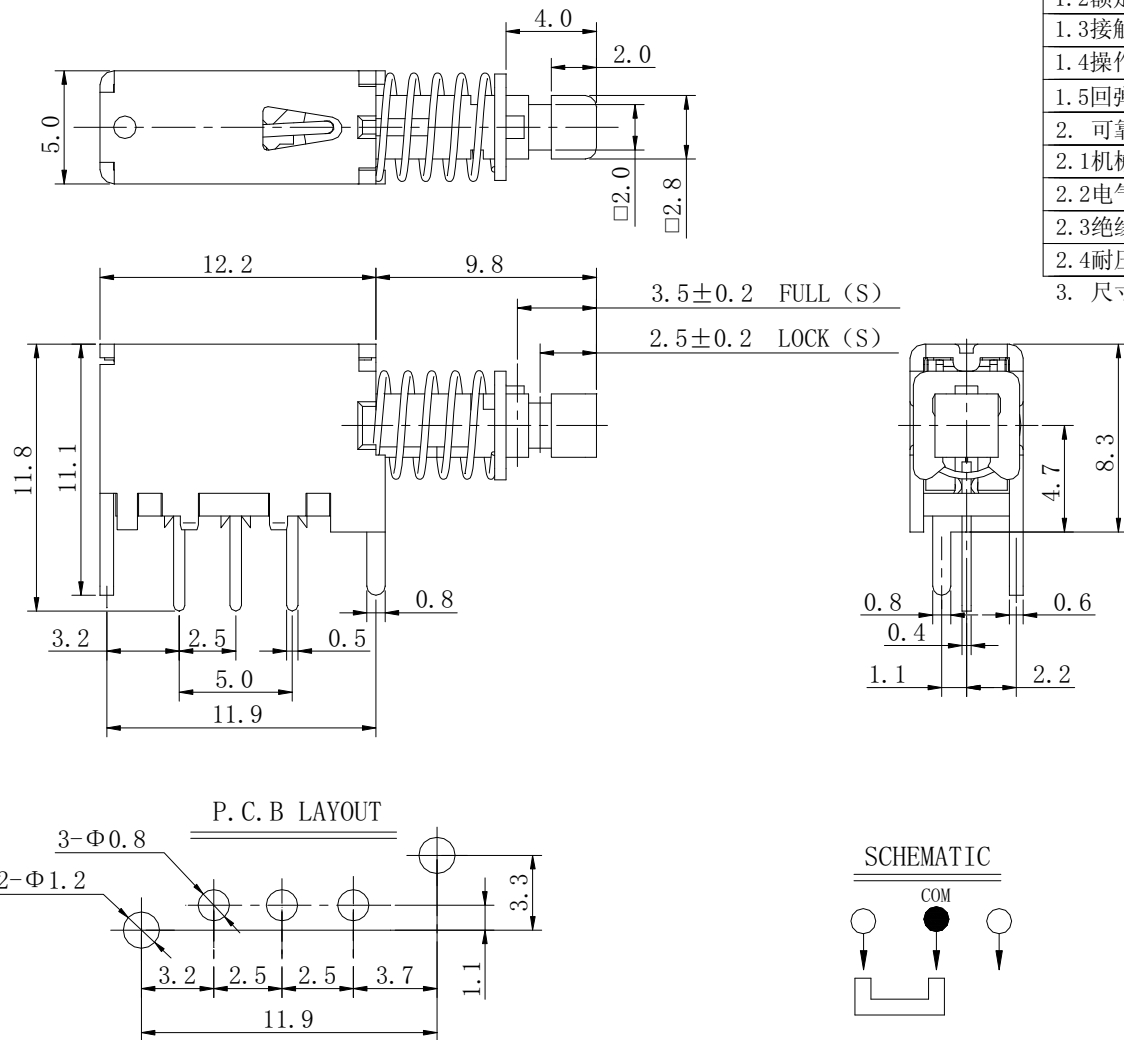

PSW25-RM-03-LF  
LEADFREE  
RoHS Compliant

SCHEMATIC




PART NO. PSW25-RM-03		CHECKED BY CY		TOLERANCES ARE .X± .XX± .XXX± AWG	DESCRIP TION:				
DWG NO. PSW25-RM-03		DRAWING BY							
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE		

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA	REVISIONS	HK	DATE
------	-----------	----	------