

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	9	12	17	18	30	35	50

MATERIAL

INSULATION: NYLON

MATERIAL: COPPER

TIN PLATING

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS

2. REINFORCEMENT SLEEVE: C TYPE SLEEVE

3. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²

INSULATED COLOR: RED

4. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²

INSULATED COLOR: BLUE


5. WIRE RANGE: 12-10 AWG / 4-6 mm²

INSULATED COLOR: YELLOW

6. MATERIAL THICKNESS: t

TOLERANCE: ±0.05

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	B ±0.20	F ±1.00	L ±1.00	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	PT-N08-16	1.9	8.5	19.5	11.0	4.1	1.7	0.75
	PT-N09-16	1.9	9.5	20.5				
	PT-N10-16	1.9	10.5	21.5				
	PT-N12-16	1.9	12.5	23.5				
	PT-N13-16	1.9	13.5	24.5				
	PT-N18-16	1.9	18.5	29.5				
16-14 AWG 1.5-2.5 mm ²	PT-N08-14	1.9	8.5	19.5	11.0	4.5	2.3	0.8
	PT-N09-14	1.9	9.5	20.5				
	PT-N10-14	1.9	10.5	21.5				
	PT-N12-14	1.9	12.5	23.5				
	PT-N13-14	1.9	13.5	24.5				
	PT-N18-14	1.9	18.5	29.5				
12-10 AWG 4-6 mm ²	PT-N13-10	2.8	13.7	26.7	13.0	6.5	3.4	1.0

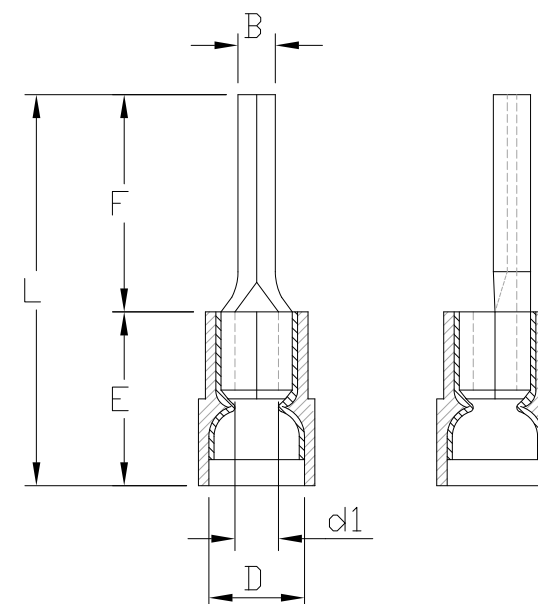

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PT-Nxx-xx-LF
 SERIES LEADFREE
 16.14.10 AWG
 08:8.5mm LONG
 18:18.5mm LONG
 NYLON

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4 PROJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±