


MATERIAL
INSULATION:NON
MATERIAL:COPPER
TIN PLATING

- NOTE:
- 1. BRAZED SEAM
 - 2. WIRE RANGE:22-16 AWG / 0.5-1.5 mm²
 - 3. WIRE RANGE:16-14 AWG / 1.5-2.5 mm²
 - 4. WIRE RANGE:12-10 AWG / 4-6 mm²
 - 5. MATERIAL THICKNESS:t
- TOLERANCE:±0.05

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	9	12	17	18	30	35	50

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	B ±0.20	F ±1.00	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	PT-X09-16	1.9	9.5	14.5	5.0	3.4	1.7	0.75
	PT-X10-16	1.9	10.5	15.5				
	PT-X12-16	1.9	12.5	17.5				
	PT-X13-16	1.9	13.5	18.5				
	PT-X18-16	1.9	18.5	23.5				
16-14 AWG 1.5-2.5 mm ²	PT-X09-14	1.9	9.5	14.5	5.0	4.1	2.3	0.8
	PT-X10-14	1.9	10.5	15.5				
	PT-X12-14	1.9	12.5	17.5				
	PT-X13-14	1.9	13.5	18.5				
	PT-X18-14	1.9	18.5	23.5				
12-10 AWG 4-6 mm ²	PT-X13-10	2.8	13.7	19.7	6.0	5.6	3.4	1.0

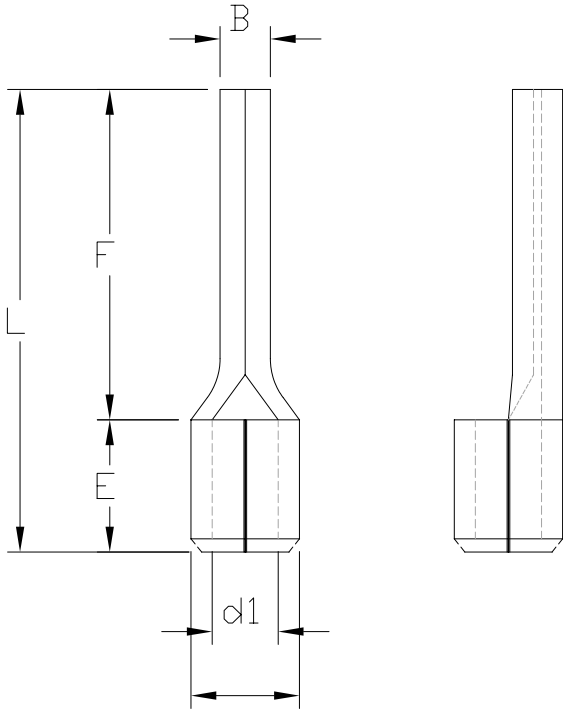

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

PT-Xxx-xx-LF
SERIES
NON PVT
LEADFREE
16:16-22 AWG
14:14-16 AWG
10:10-12 AWG
09:9.5mm LONG
18:18.5mm LONG

DESCRIPTION: