

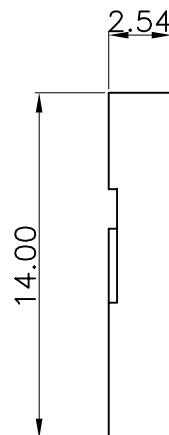


CIRCUIT 1

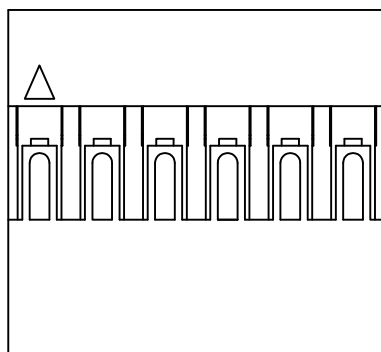

NOTES:

1. MATERIAL(HALOGEN FREE): NYLON 66 UL 94V-0 (BLACK)

Pin	DIM. (mm)		Pcs/Bag	Pin	DIM. (mm)		Pcs/Bag
	A	B			A	B	
1x01	-	2.54	1,000	1x12	27.94	30.48	1,000
1x02	-	5.08	1,000	1x13	30.48	33.02	1,000
1x03	5.08	7.62	1,000	1x14	33.02	35.56	1,000
1x04	7.62	10.16	1,000	1x15	35.56	38.10	1,000
1x05	10.16	12.70	1,000	1x16	38.10	40.64	500
1x06	12.70	15.24	1,000	1x17	40.64	43.18	500
1x07	15.24	17.78	1,000	1x18	43.18	45.72	500
1x08	17.78	20.32	1,000	?	?	?	?
1x09	20.32	22.86	1,000	1x30	73.66	76.20	500
1x10	22.86	25.40	1,000	?	?	?	
1x11	25.40	27.94	1,000	1x40	99.06	101.60	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PV-H-1Xxx-LF
SERIES LEADFREE
1X01:01WAY
1X40:40WAY
HOUSING

DESCRIPTION: WIRE TO BOARD, PLUG, PITCH 2.54mm, SINGLE ROW, CRIMP TYPE, INSULATOR