




AWG#30~#32


AWG#22~#28

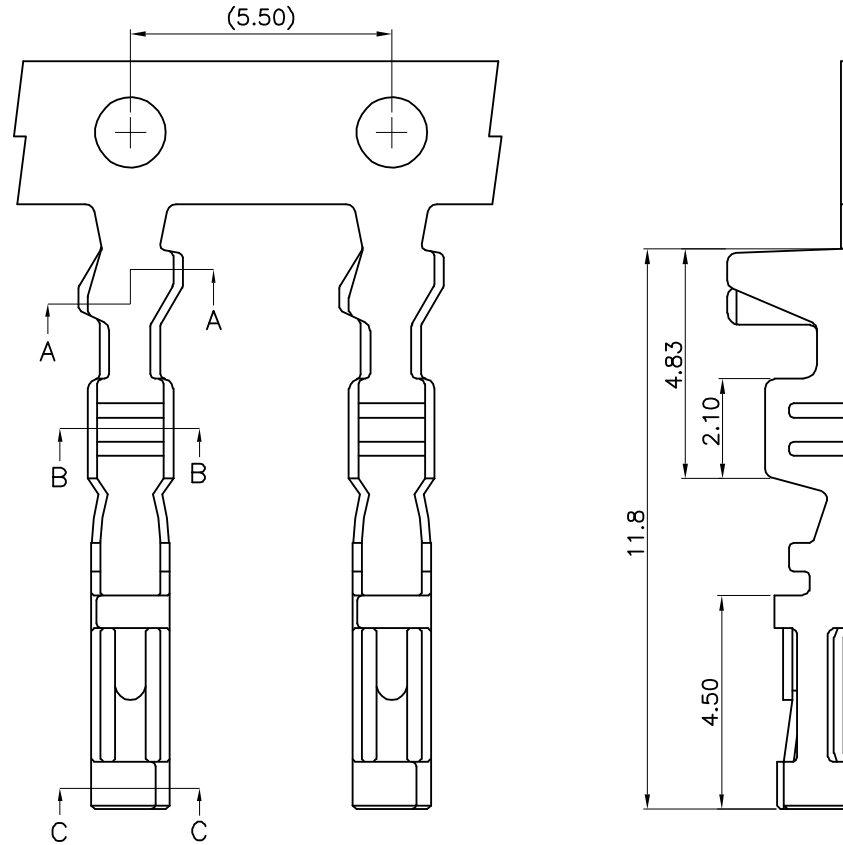



Section A-A




Section B-B



Section C-C

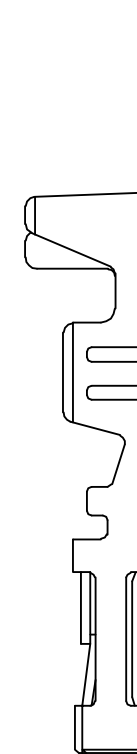

Section A-A



Section B-B

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.20\text{mm}$
BRASS, $t=0.20\text{mm}$
2. FINISH: TIN-PLATED OVER NICKEL
3. APPLICABLE WIRE RANGE: SEE CONTACT INFORMATION
4. INSULATION O.D.: $\phi 1.60\text{mm}$ (MAX.)

CONTACT INFORMATION:

Part No.	Wire Range	DIM.(mm)			
		A	B	C	D
PV-T-22	AWG#22~#28	2.20	2.60	1.80	1.80
PV-T-30	AWG#30~#32	2.20	2.60	1.40	1.40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

照片框

ORDER INFORMATION

PV-T-xx-LF
SERIES | T LEADFREE
22:22~28 AWG
30:30~32 AWG
TERMINAL





DESCRIPTION: WIRE TO BOARD, PITCH 2.54mm, CRIMP TYPE, CONTACT

PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	565*565*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
PV-T-xx	12,000	6	72,000

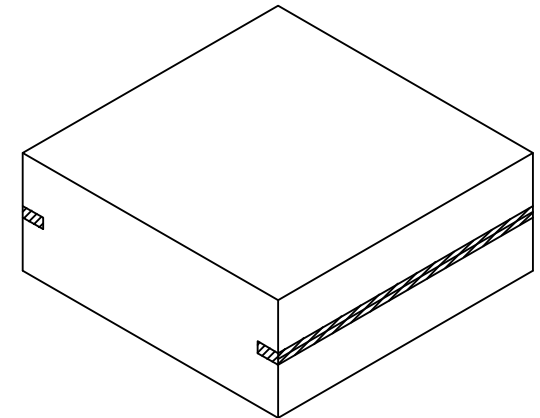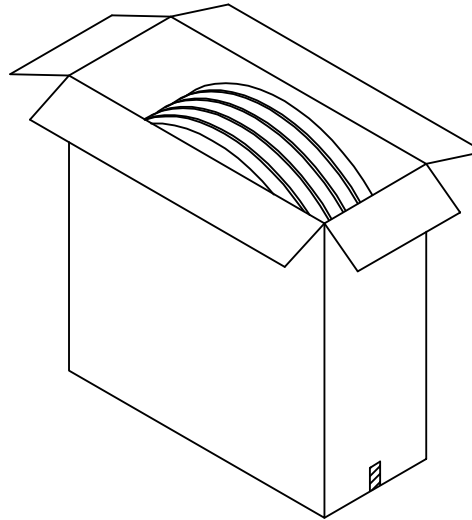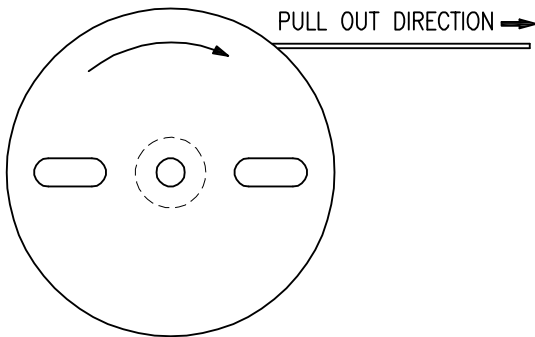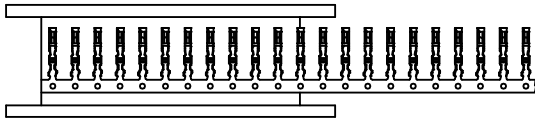

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PV-T-xx-LF
SERIES T LEADFREE
22:22~28 AWG
30:30~32 AWG
TERMINAL

DESCRIPTION: WIRE TO BOARD, PITCH 2.54mm, CRIMP TYPE, CONTACT