

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

PVC-xxxxyy-xxxF-LF LEADFREE

I.D.  
008:0.864mm  
009:0.965mm  
127:12.7mm


COLOR  
BK:BLACK  
CL:CLEAR

PER ROLL  
1000 FEET  
250 FEET

RoHS Compliant

PART NO.	SIZE AWG	INSIDE DIAMETER	CAT.No. DEV-300 (300V.105°C)			CAT.No. DEV-600 (600V.105°C)		
			MIN THICKNESS AT TNY POINT	AVG THICKNESS	OUTSIDE DIAMETER	MIN THICKNESS AT TNY POINT	AVG THICKNESS	OUTSIDE DIAMETER
	20	0.864	0.330	0.40	1.70	0.431	0.60	2.10
	19	0.965	0.330	0.40	1.80	0.431	0.60	2.20
	18	1.067	0.330	0.40	1.90	0.431	0.60	2.30
	17	1.19	0.330	0.40	2.00	0.559	0.70	2.60
	16	1.34	0.330	0.40	2.15	0.559	0.70	2.75
	15	1.50	0.330	0.40	2.30	0.559	0.70	2.90
	14	1.68	0.330	0.40	2.50	0.559	0.70	3.10
	13	1.93	0.330	0.40	2.70	0.559	0.70	3.35
	12	2.16	0.330	0.40	3.00	0.559	0.70	3.60
	11	2.41	0.330	0.40	3.20	0.559	0.70	3.80
	10	2.69	0.330	0.40	3.50	0.559	0.70	4.10
	9	3.00	0.431	0.55	4.10	0.559	0.70	4.40
	8	3.38	0.431	0.55	4.50	0.559	0.70	4.80
	7	3.76	0.431	0.55	4.90	0.559	0.70	5.20
	6	4.22	0.431	0.55	5.35	0.559	0.70	5.65
	5	4.72	0.431	0.55	5.85	0.559	0.70	6.15
	4	5.28	0.431	0.55	6.40	0.559	0.70	6.70
	3	5.94	0.431	0.55	7.05	0.559	0.70	7.35
	2	6.68	0.431	0.55	7.80	0.559	0.70	8.10
	1	7.47	0.431	0.55	8.60	0.559	0.70	8.90
	0	8.38	0.431	0.55	9.50	0.559	0.70	9.80
	5/16"	7.92				0.559	0.70	9.35
	3/8"	9.53				0.559	0.70	10.95
	7/16"	11.10				0.559	0.70	12.50
	1/2"	12.70				0.559	0.70	14.10

L=FEET (M) /ROLL
1000(304.8)
500(152.4)
500(152.4)
250(76.2)
250(76.2)

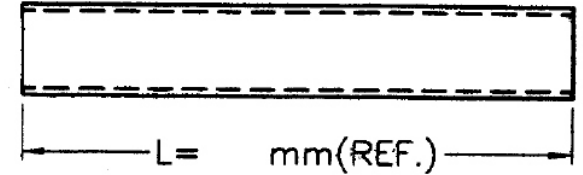

(公差表-2)

成型尺寸	公差
5mm以下	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm以上	±1.0

(公差表-1)

成型尺寸	公差
10mm以下	±1.0
10~30mm	±2.0
30~50mm	±3.0
50~70mm	±4.0
70~100mm	±5.0
100mm以上	±6.0

(公差表-2)



煜倫股份有限公司

PART NO. PVC-xxxxyy-xxxF

DWG NO. PVC-xxxxyy-xxxF

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ± 0.1  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE