

*Ploes:4~80

*Material:PBTP UL94V-0 BLACK

Specifications

*Current rating:3A AC,DC


*Voltage rating:250V AC,DC

*Temperature range:-25°C~+85°C



*Insulation resistance:1,000M Ω min.

*Withstand voltage:1,000V AC/minute

CIRCUITS	DIMENSION		CIRCUITS	DIMENSION	
	A	B		A	B
4	0.100(2.54)	0.200(5.08)	28	1.300(33.02)	1.400(35.54)
6	0.200(5.08)	0.300(7.62)	30	1.400(35.54)	1.500(38.10)
8	0.300(7.62)	0.400(10.16)	32	1.500(38.10)	1.600(40.64)
10	0.400(10.16)	0.500(12.70)	34	1.600(40.64)	1.700(43.18)
12	0.500(12.70)	0.600(15.24)	36	1.700(43.18)	1.800(45.72)
14	0.600(15.24)	0.700(17.78)	38	1.800(45.72)	1.900(48.26)
16	0.700(17.78)	0.800(20.32)	40	1.900(48.26)	2.000(50.80)
18	0.800(20.32)	0.900(22.86)	42	2.000(50.80)	2.100(53.34)
20	0.900(22.86)	1.000(25.40)	44	2.100(53.34)	2.200(55.88)
22	1.000(25.40)	1.100(27.94)	46	2.200(55.88)	2.300(58.42)
24	1.100(27.94)	1.200(30.48)	48	2.300(58.42)	2.400(60.96)
26	1.200(30.48)	1.300(33.02)	50	2.400(60.96)	2.500(63.50)

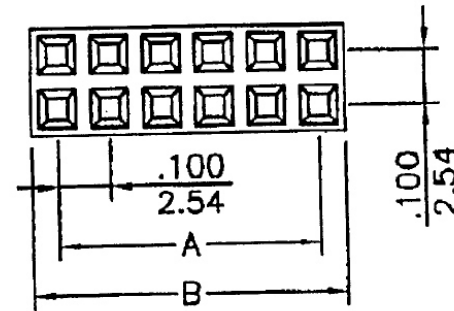

inches
mm

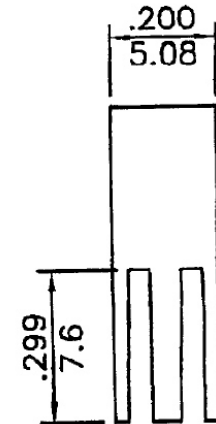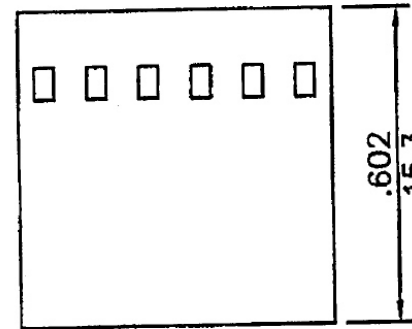

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PVF-H-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X50:100WAY
HOUSING

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: