


NOTES

- * Poles:4-100
- * Material:NORYL UL94-V1 ,BLACK

Specifications

- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

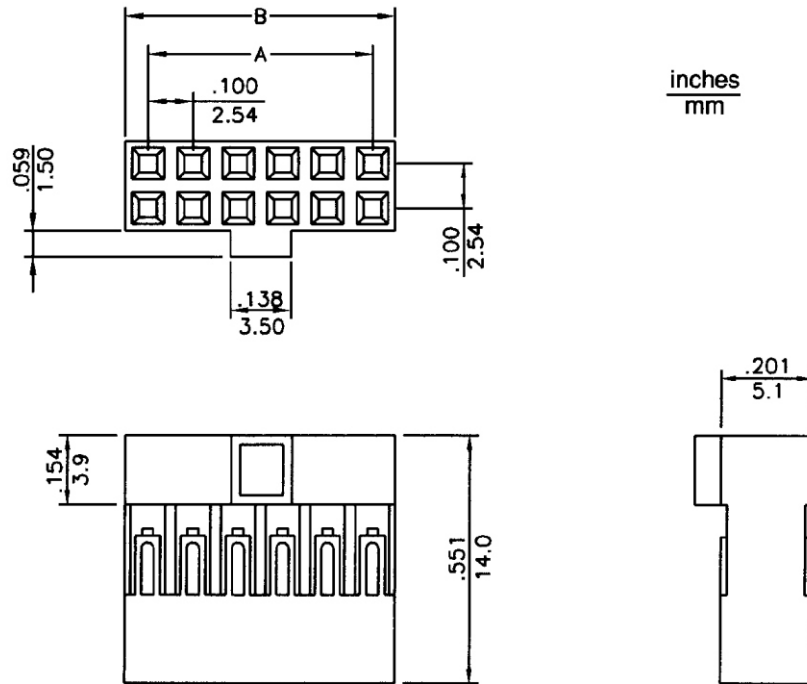

CIRCUITS	DIMENSION in.(mm)	
	A	B
4	0.100(2.54)	0.200(5.08)
6	0.200(5.08)	0.300(7.62)
8	0.300(7.62)	0.400(10.16)
10	0.400(10.16)	0.500(12.70)
12	0.500(12.70)	0.600(15.24)
14	0.600(15.24)	0.700(17.78)
16	0.700(17.78)	0.800(20.32)
18	0.800(20.32)	0.900(22.86)
20	0.900(22.86)	1.000(25.40)
22	1.000(25.40)	1.100(27.94)
24	1.100(27.94)	1.200(30.48)
26	1.200(30.48)	1.300(33.02)
28	1.300(33.02)	1.400(35.56)
30	1.400(35.56)	1.500(38.10)
32	1.500(38.10)	1.600(40.64)
34	1.600(40.64)	1.700(43.18)
36	1.700(43.18)	1.800(45.72)
38	1.800(45.72)	1.900(48.26)
40	1.900(48.26)	2.000(50.80)
42	2.000(50.80)	2.100(53.34)
44	2.100(53.34)	2.200(55.88)
46	2.200(55.88)	2.300(58.42)
48	2.300(58.42)	2.400(60.96)
50	2.400(60.96)	2.500(63.50)
52	2.500(63.50)	2.600(66.04)
54	2.600(66.04)	2.700(68.58)
56	2.700(68.58)	2.800(71.12)
58	2.800(71.12)	2.900(73.66)
60	2.900(73.66)	3.000(76.20)
62	3.000(76.20)	3.100(78.74)
64	3.100(78.74)	3.200(81.28)
66	3.200(81.28)	3.300(83.82)
68	3.300(83.82)	3.400(86.36)
70	3.400(86.36)	3.500(88.90)
72	3.500(88.90)	3.600(91.44)
74	3.600(91.44)	3.700(93.98)
76	3.700(93.98)	3.800(96.52)
78	3.800(96.52)	3.900(99.06)
80	3.900(99.06)	4.000(101.60)
100	4.900(124.46)	5.000(127.00)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PVK-HA-2Xxx-LF
SERIES | LEADFREE
2X02:04WAY
2X50:100WAY
A TYPE
HOUSING

DESCRIPTION: