


SPECIFICATIONS

MATERIAL:

1. Insulator : nylon polymer UL 94-V0
2. Color : Red
3. Contacts : Sq 0.64mm Gold/Tin Sletive Plated

ELECTRICAL:

1. Current Rating : 1.5 AMP
2. Operation Temperature : -40 C° to + 105 C
3. Contact Resistance : 10 Milliohms MAX
4. Insulation Resistance : 1000 Milliohms MIN
5. Dielectric Withstanding Voltage : 500V AC

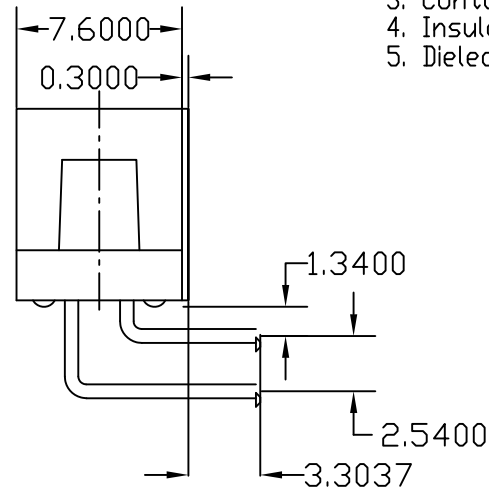

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

PVK-RB-2X05-LF
SERIES | LEADFREE
BOX | 10 WAY
DIP 90°

DESCRIPTION: Box Header