


項目	規格
T	0.25± 0.03
L	22.1± 0.3
W	3.07± 0.1
E	3.50± 0.2
IS	5.10± 0.4
WS	3.0 ± 0.4
H8	3.60± 0.25
H9	4.70± 0.25
W1	4.40± 0.2
W2	3.75± 0.2
W3	3.2 ± 0.1
W4	(2.8)

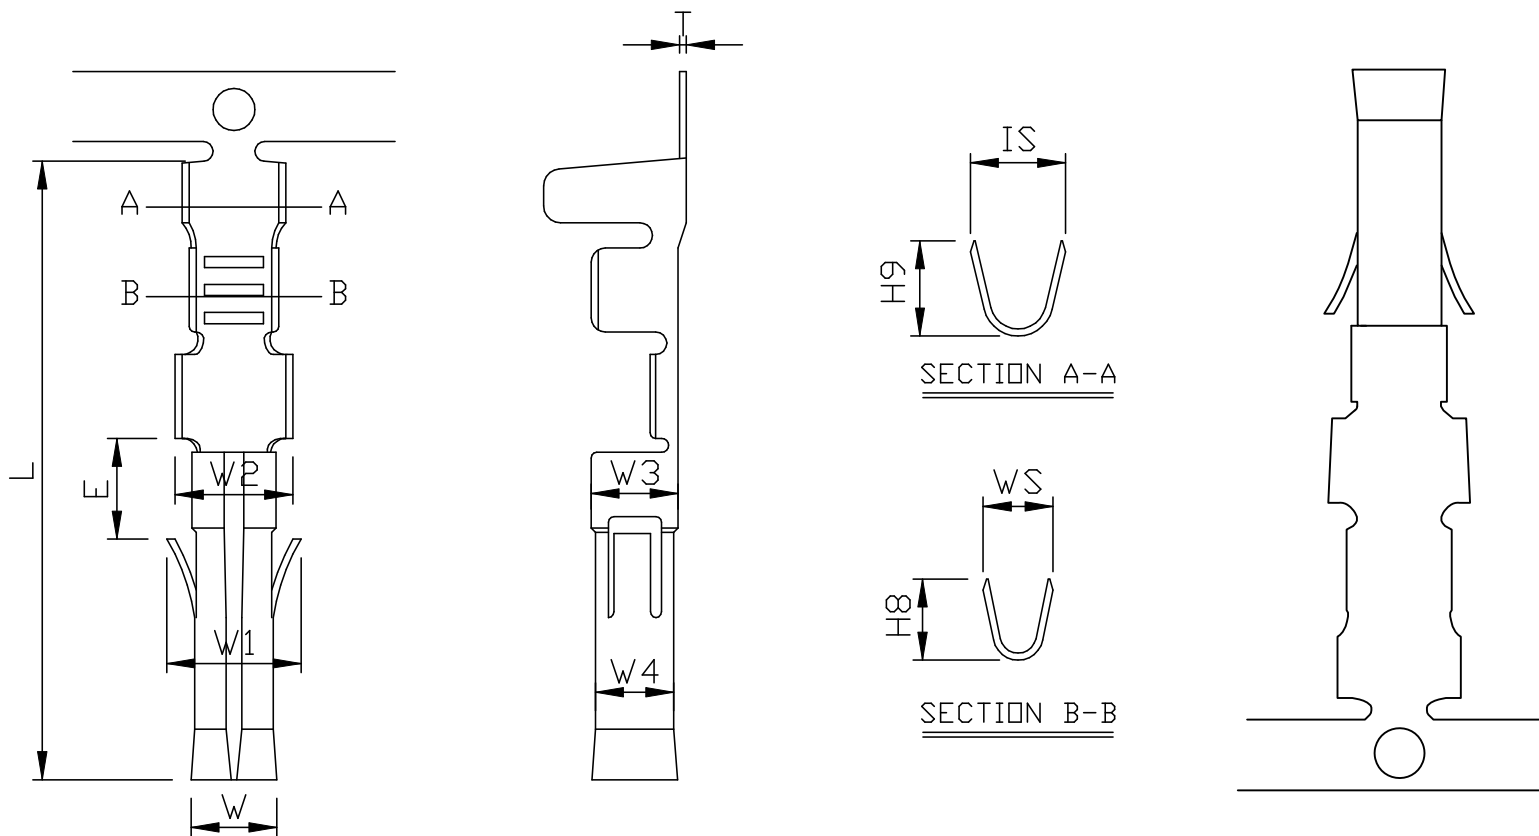

配合塑膠:插入力 1.5 KG MAX
脫拔力 5.0 KG MIN

公母對插:插入力 0.7-1.8 KG

適用電線	線皮外徑	端子材質	包裝數量	表面處理
14~20	1.5-2.7	BRASS.SH	5000 PCS	TIN-Plated

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X.±

.X±

.XX±

.XXX±

ANG±

PPOJECTION

照片框

ORDER INFORMATION

PW-F-14-LF
SERIES | T LEADFREE
14~20 AWG
FEMALE TERMINAL

DESCRIPTION: