


項目	規格
T	0.25± 0.03
L	22.1± 0.3
W	3.07± 0.1
E	3.50± 0.2
IS	3.60± 0.4
WS	2.60± 0.4
H8	3.60± 0.25
H9	3.30± 0.25
W1	4.40± 0.2
W2	3.75± 0.2
W3	3.2 ± 0.1
W4	(2.8)

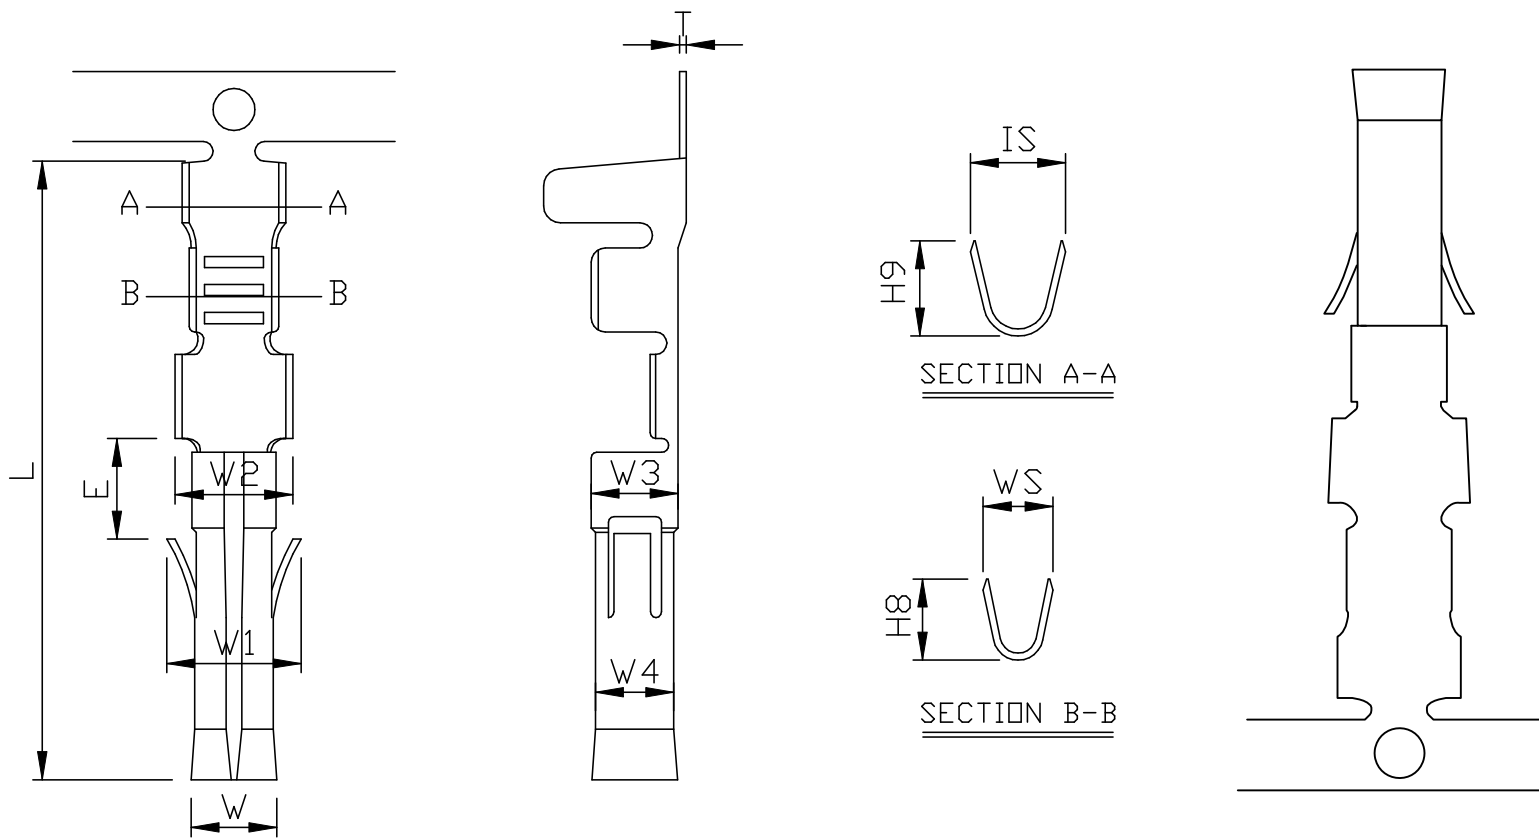

配合塑膠:插入力 1.5 KG MAX
脫拔力 5.0 KG MIN

公母對插:插入力 0.6-1.5 KG

適用電線	線皮外徑	端子材質	包裝數量	表面處理
24~20	1.5-2.7	BRASS.SH	5000 PCS	TIN-Plated

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XX±

DATE

.XXX±

ANG±

SIZE A4

PJECTION

照片框

ORDER INFORMATION

PW-F-20-LF
SERIES | LEADFREE
20~24 AWG
FEMALE TERMINAL

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: