
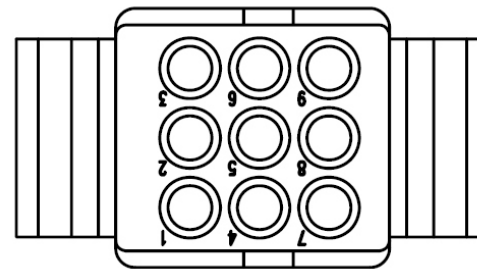
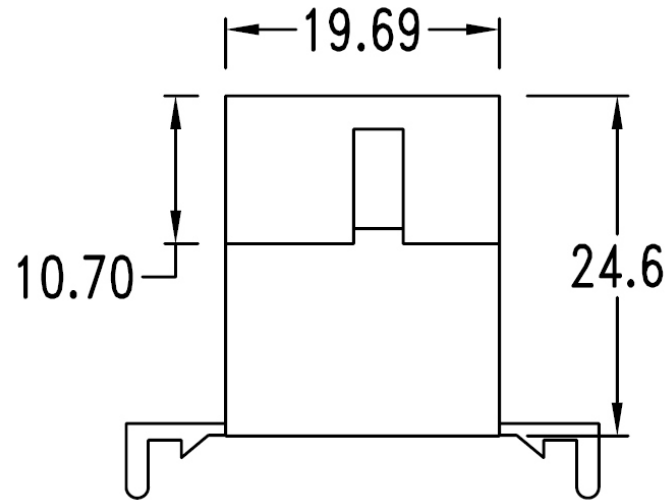


Features:

- Integrally molded polarization
- 94V-2 rated nylon
- .198"(5.03mm) spacing in a grid pattern
- Integrally molded mounting ears available
- Standard color: Nature
- With or without convex
- UL file No.: E114003

Specification:

- Current rating: 9A AC, DC
- Voltage rating: 250V AC, DC
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -40°C ~ 105°C

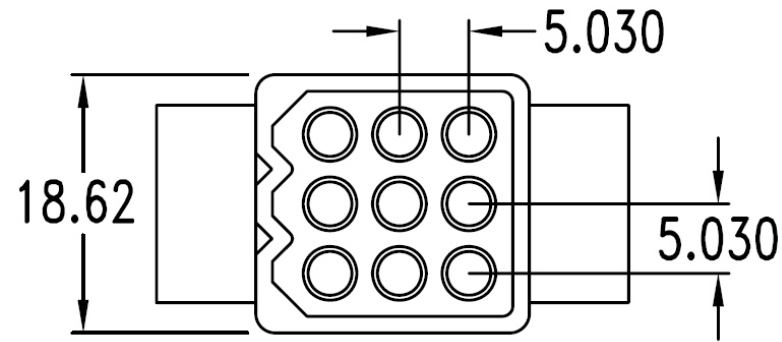

PW-PEL-3X03-LF
LEADFREE

RoHS Compliant



PART NO. **PW-PEL-3X03**

DWG NO. **PW-PEL-3X03**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司