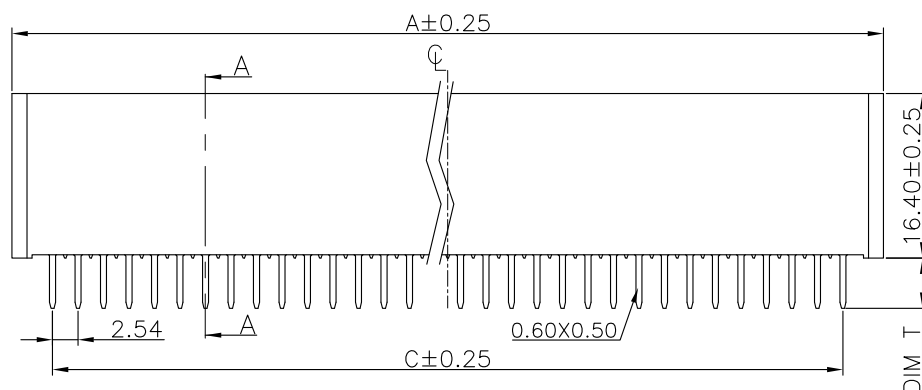

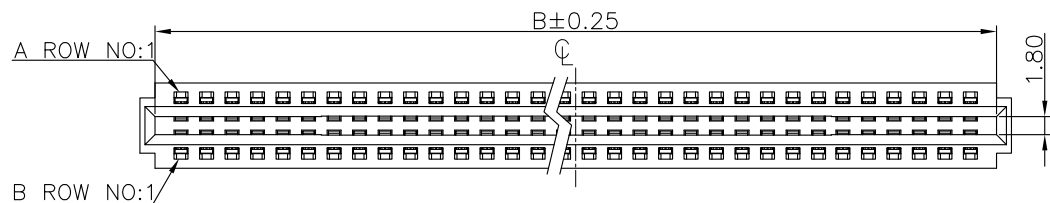


DIM T=3.5mm
DIM T=2.8mm
DIM T=5.0mm

Material and Plating:

Housing: LCP, UL94V-0, BLACK.

Power Contacts: High Conductivity Copper .
30u" Au+Pd/Ni on Contact Area and 80u" Min Tin Plated
on Solder Tail over nickel 50u" Min under plated .

Electrical Characteristics:

Current Rating: 12.5 A(UL).

Dielectric Withstanding Voltage: DC 1000V For 1 minute.

Insulator Resistance: 5000MΩ min. at DC 500V.

Contact Resistance: 2.5mΩ max. at DC 100mA.

Operating Temperature: -5°C ~+105°C .

***RoHS Compliant**

Position	DIM			
	A	B	C	D
50	69.04	66.04	60.96	65.74
64	86.82	83.82	78.74	83.52

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION


照片框

ORDER INFORMATION



PWE-DDxx-xxx-LF

SERIES | LEADFREE
050.064 WAY
D28:DIP 2.8mm
D35:DIP 3.5mm
D50:DIP 5.0mm
DIP


DESCRIPTION:

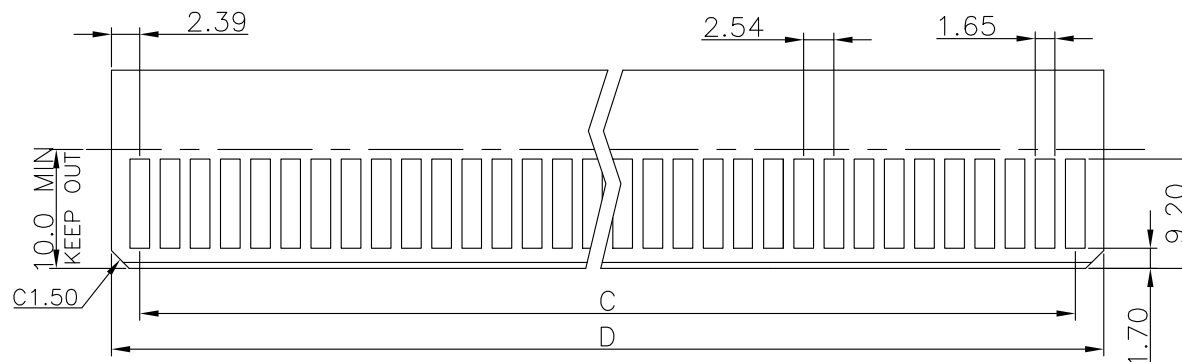

RECOMMENDED MATTING BOARD FOOTPRINT
(Tolerance: ± 0.05)

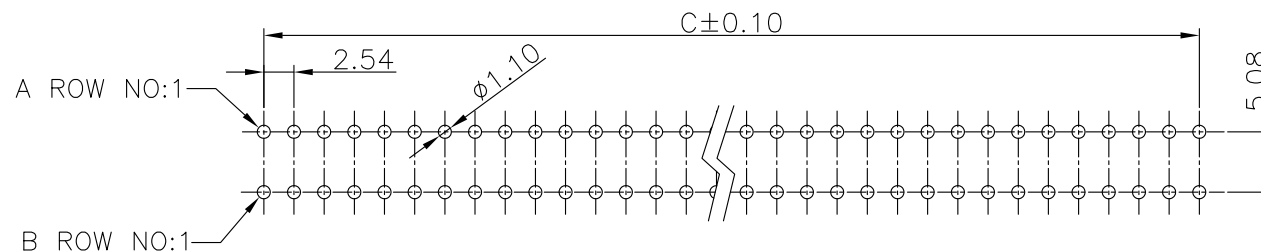

P.C. Board Layout
(Tolerance: ± 0.05)



DETAIL: A-A
SCALE : 2:1

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PWE-DDxx-xxx-LF

SERIES LEADFREE

050.064 WAY

D28:DIP 2.8mm




D35:DIP 3.5mm

D50:DIP 5.0mm

DIP

DESCRIPTION:

注意：底盤PET-9393A-005厚度=0.6mm
蓋子PET-9393A-006厚度=0.5mm

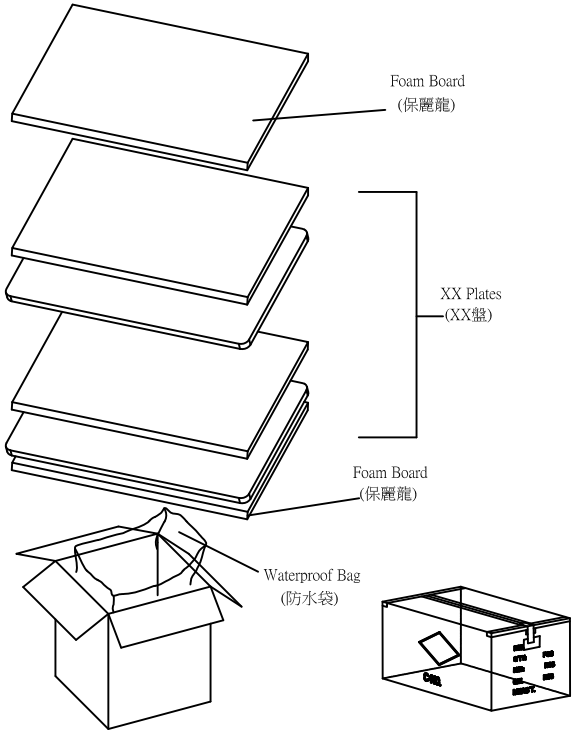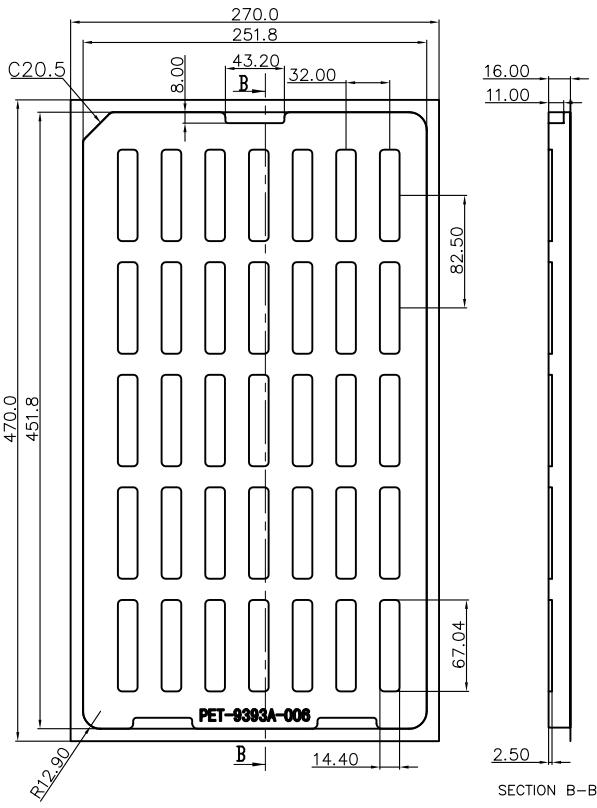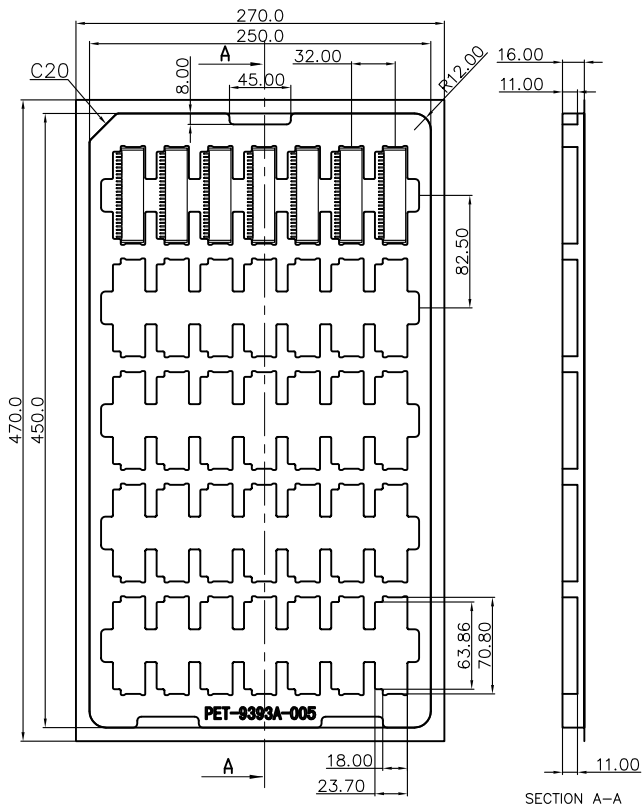

生产参数	
颗数	35颗/盘
盘数	6盘/箱
包装数	210颗/箱

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

照片框

ORDER INFORMATION

PWE-DDxx-xxx-LF

SERIES

LEADFREE

050.064 WAY

D28:DIP 2.8mm

D35:DIP 3.5mm

D50:DIP 5.0mm

DIP

DESCRIPTION: