
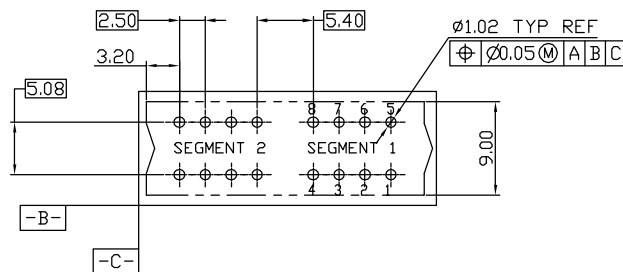

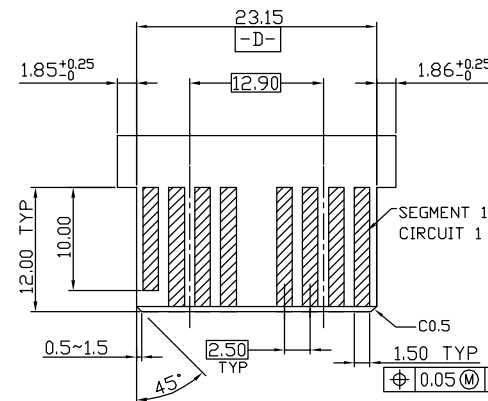




RECOMMENDED TIN PLATED THROUGH HOLE DIMENSIONS
COPPER PLATE THICKNESS: 0.03MIN.(PER SURFACE)
TIN PLATE THICKNESS: 0.0003MIN.(PER SURFACE)

NOTES:

1. HOUSING MATERIAL: THERMOPLASTIC POLYESTER UL94V-0 BALCK;
TERMINAL MATERIAL: COPPER ALLOY
2. FINISHED: GOLD PATING IN CONTACT AREA,
TIN PLATING IN SOLDER AREA,NICKEL UNDERPLATING OVER ALL.
3. CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
4. CURRENT
SINGAL CONTACT: 3A,PER MATED CONTACT FOR UL.
5. INSULATION RESISTANCE: 5000 MEGOHMS AT APPLY 500 VDC
BETWEEN ADJACENT TERMINALS OR GROUND.
6. TEPPERATURE
OPERATING:-40°C TO +105°C
7. PCB THICKNESS: 2.36MM MIN

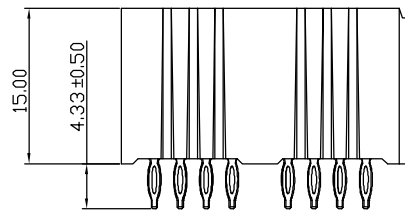

PCB LAYOUT: COMPONENT SIDE
TOLERANCE: ±0.05



RECOMMENDED EDGE CARD LAYOUT
EDGE CARD THICKNESS : 1.57±0.15mm
TOLERANCE: ±0.05
Au PLATE THICKNESS: 0.000762 MIN.

16	SIGNAL	SIGNAL	NA	NA
POS.	SEGMENT 1	SEGMENT 2	SEGMENT 3	SEGMENT 4

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

PWE-P-0802-LF

SERIES LEADFREE
16 WAY
PRESS FIT

DESCRIPTION: POWER EDGE CONNECTOR SIGNAL PRESS-FIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com