
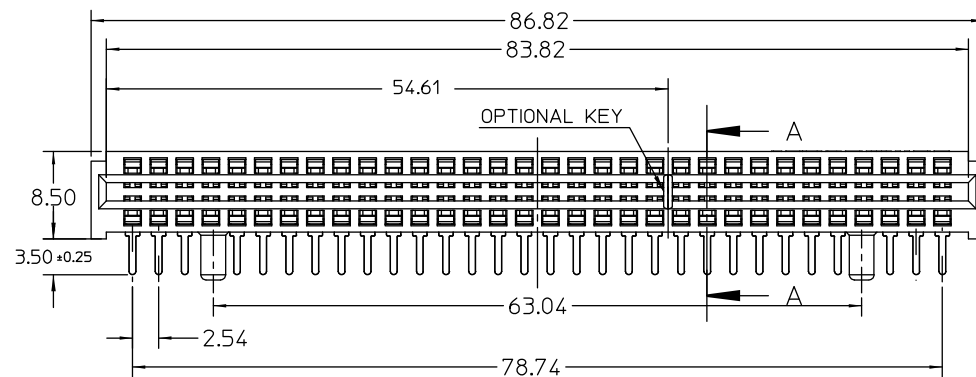
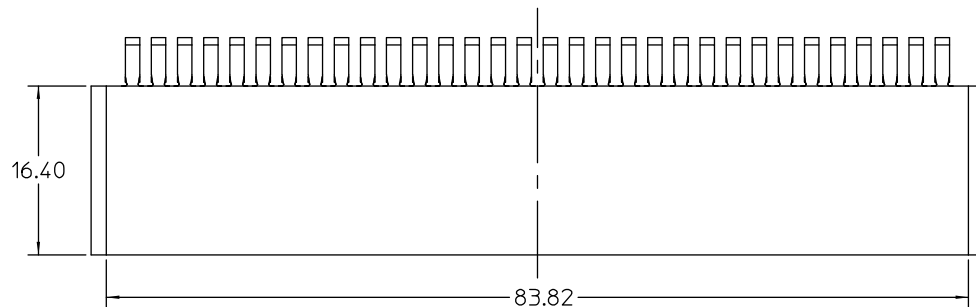
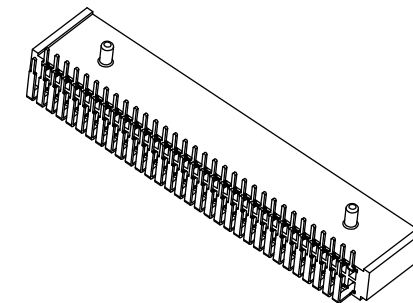
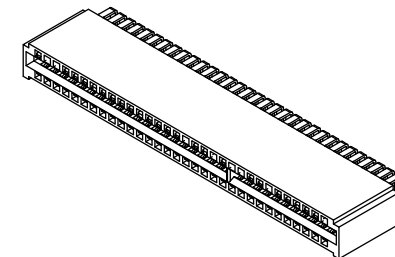


SECTION A-A

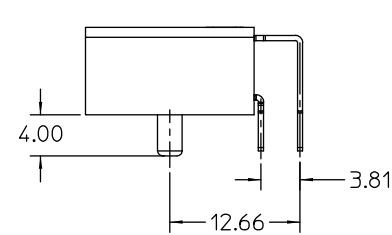

NOTES:

1. MATERIAL:

HOUSING: THERMOLPLASTIC, GLASS FIBER FILLED, UL94V-0, COLOR:BLACK.
CONTACT: HIGH CONDUCTIVITY COPPER ALLOY.

2. PLATING:

CONTACT AREA: SEE TABLE
SOLDER AREA: SELECTIVELY PLATE TIN 2.54 MICROMETER/100u" MINIMUM ON THE SOLDER AREA,
UNDERPLATE NICKEL 1.27 MICROMETER/50u" MINIMUM OVERALL.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.20
.XXX ±
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

PWE-R35P-064-LF
SERIES POST 64 WAY LEADFREE
DIP 3.5mm
DIP 90°

DESCRIPTION: POWER EDGE CARD CONNECTOR 2.54MM PITCH, 64 CIRCUITS R/A DIP TYPE

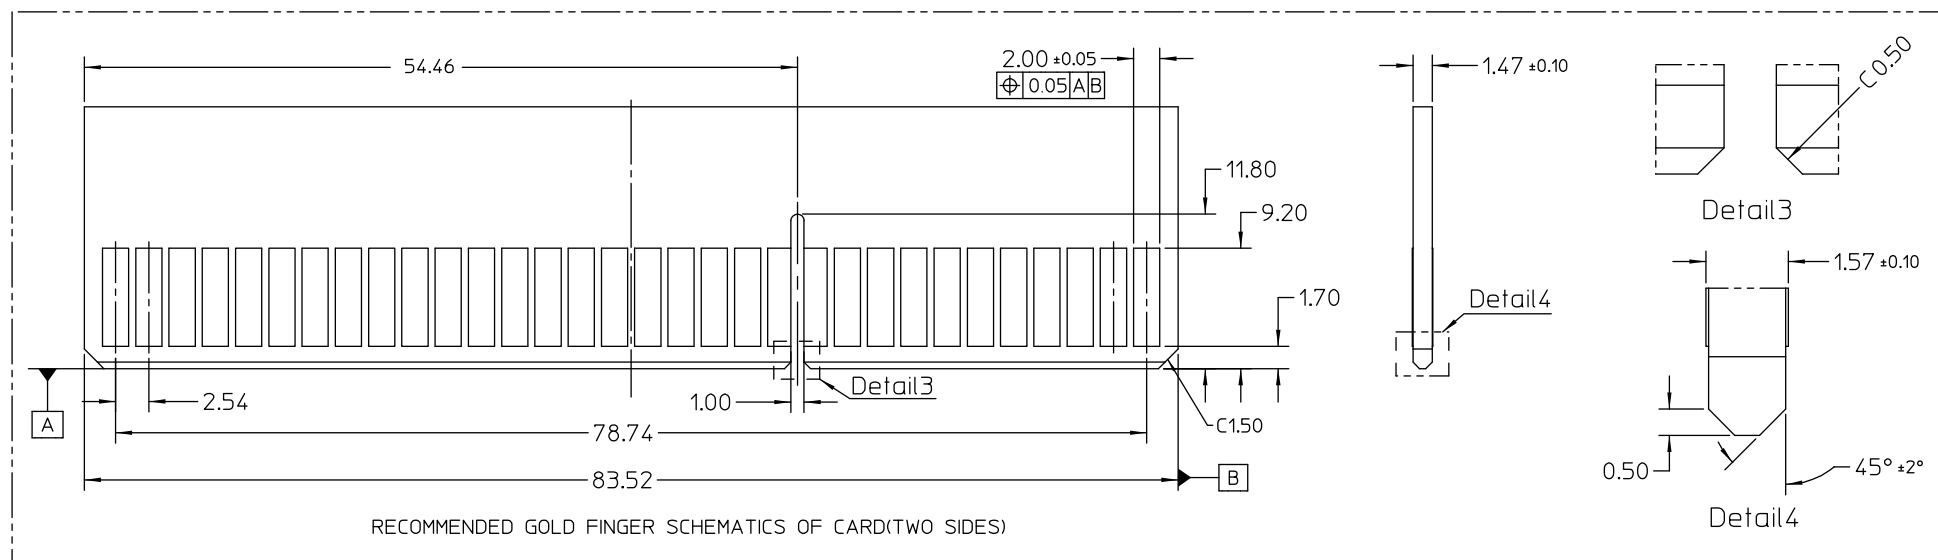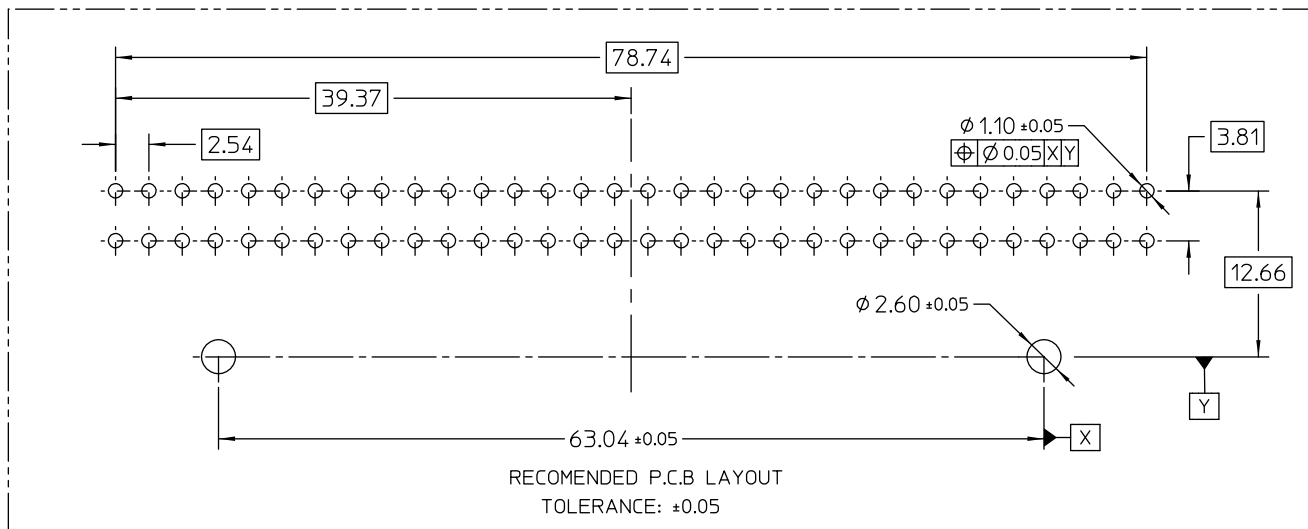

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.25
.XX ± 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PWE-R45P-064-LF

SERIES
LEADFREE
64 WAY
POST
CENTER HIGH 4.5mm
DIP 90°

DESCRIPTION: POWER EDGE CARD CONNECTOR 2.54MM PITCH, 64 CIRCUITS R/A DIP TYPE