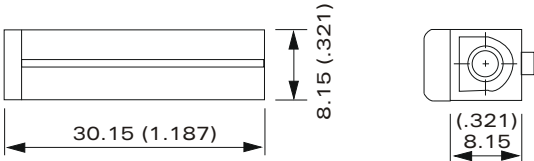
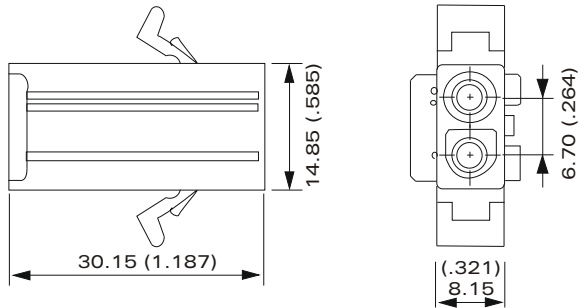


- * Material : Nylon UL 94V-0 or 94V-2
- * Integrally molded polarization
- * Positive lock
- * Integrally molded mounting ears is available on plug housing only
- * 1,2,3,4,5,6,9,12,15 circuits available

PWL-P-xXxx-LF
 LEADFREE

RoHS Compliant

mm (inch)

Circuits	Max-Rated		Dimensional Information	
	Amps	Voltage	Plug	Receptacle
1	12A	600V		

PWL-P-1X01

PWL-P-1X02



PART NO. **PWL-P-1Xxx**

DWG NO. **PWL-P-1Xxx**

FILE NO.

UNIT / mm

SCALE 1 : 1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
 .XX ±
 .XXX ±
 AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

Circuits	Max-Rated		Dimensional Information	
	Amps	Voltage	Plug	

PWL-P-3X05 PWL-P-3X04 PWL-P-3X03 PWL-P-2X03 PWL-P-1X04 PWL-P-1X03

DATE

煜倫股份有限公司