



Features:

- Insulation material: UL 94V-2 nylon 66
- Contact material: Tin-plated brass
- Standard color: Nature

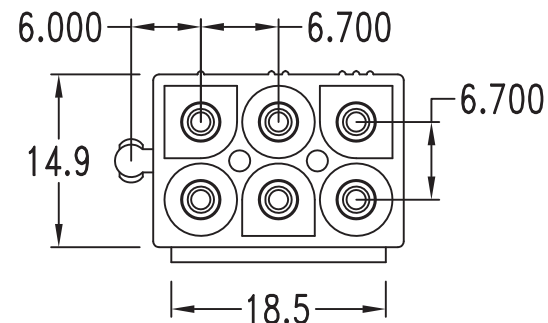

Specifications:

- Current rating: 9A AC, DC
- Voltage rating: 600V AC, DC
- Dielectric withstanding voltage: 5000V AC rms
- Ambient temperature range: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
(Including temperature rise)

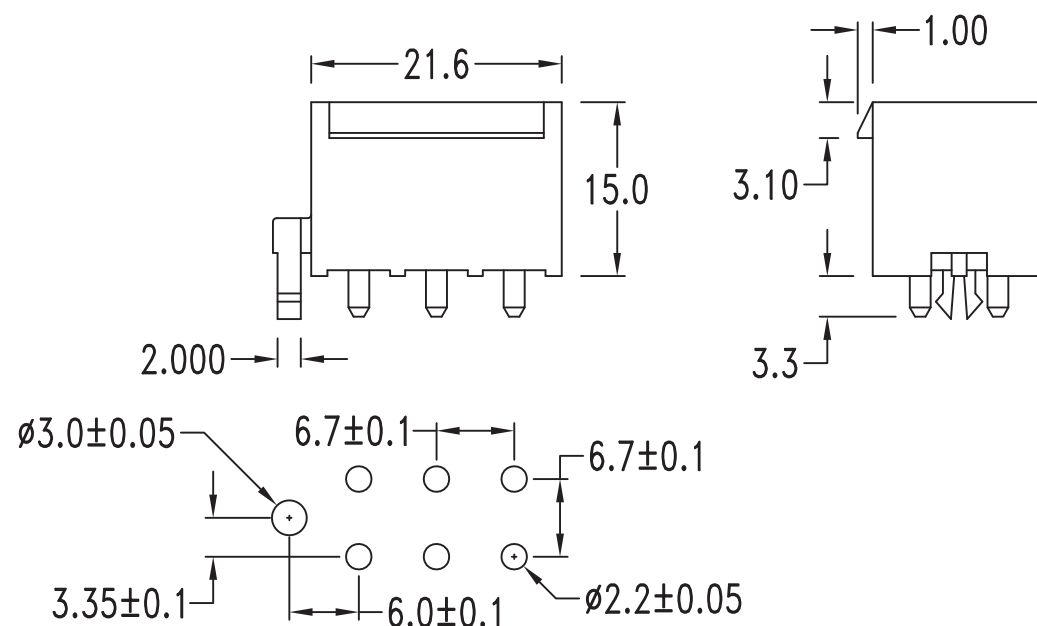

P. C. board hole dimensions

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PWL-PDP-2X03-LF

SERIES

POST

DIP 180°

MALE

06 WAY

LEADFREE

DESCRIPTION: .093"(6.7mm) Vertical Header