






Specifications


Current Rating	:5A AC, DC
Voltage rating	:250V AC, DC
Temperature range	: -25°C ~ +85°C
Contact resistance	:20mΩ Max
Insulation resistance	:1000MΩ Min
Withstanding voltage	:1500V AC/minute
Finished	:Tin-plated/ Gold-plated
Housing Material	:PA46, UL94 V-2



剖面圖 A-A

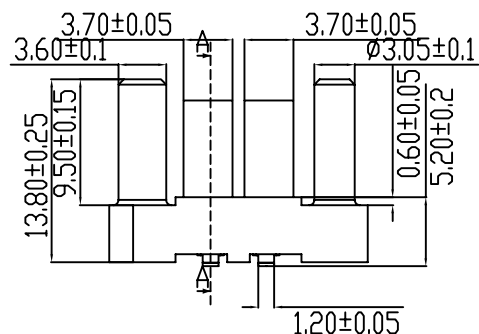

P.C.B LAYOUT



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PWMT-SVXF-2X02-LF

SERIES

LEADFREE
04 WAY
FLANGE
NON POST
180°SMT
FEMALE

DESCRIPTION: