



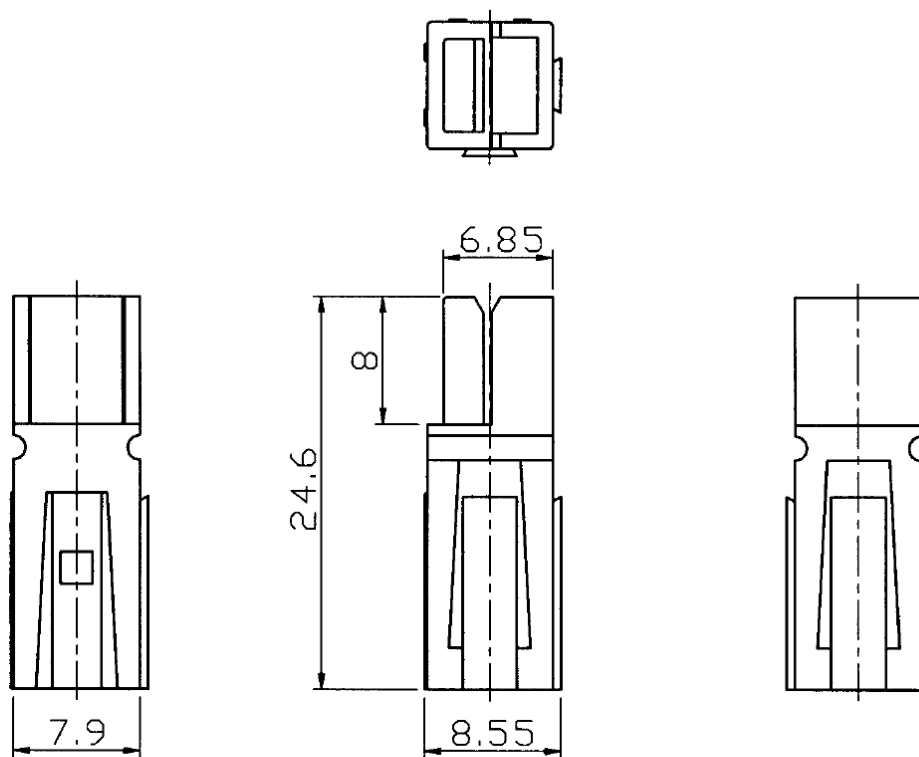

SCALE 2:1

NOTE:

1. OPERATING TEMPERATURE RANGE: $-20^{\circ}\text{C} \sim +125^{\circ}\text{C}$
2. MAXIMUM ELECTRICAL RATING: 600 VOLTS MAX.
3. HOUSING MATERIAL: POLYCARBONATE (PC)
4. SPRING MATERIAL: STAINLESS STEEL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$ 0.10

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PWP-HBK-01-LF
SERIES T T LEADFREE
01 WAY
BLACK
HOUSING

DESCRIPTION: SINGLE-POLE HOUSING 15/45Amp HOUSING BLACK