
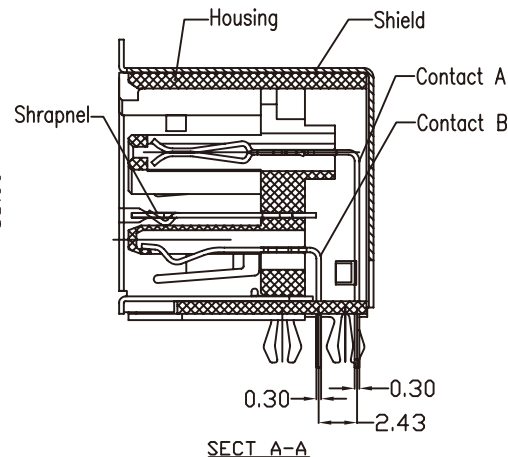
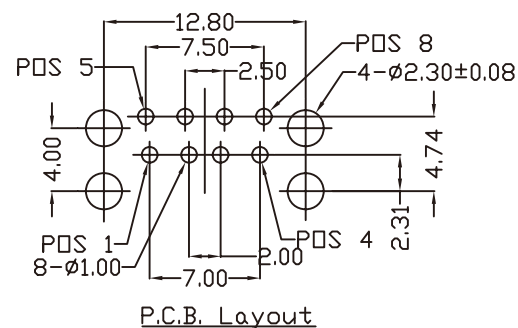


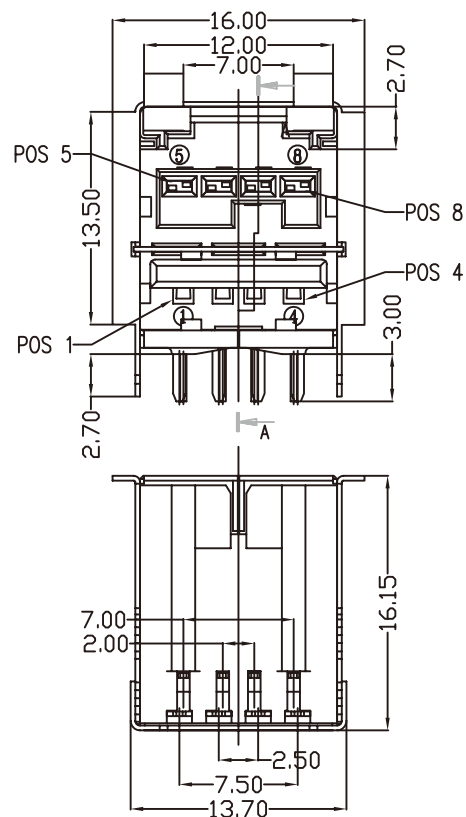

NOTES:

1. Mateial


Housing: NYLON66, Glass Fiber 30%, UL 94V-0 rated,
 Color: See TABLE A
 Contact: Phosphor Bronze;
 Contacts Plating: Gold(30u")min. plating over Nickel(40u")min. on contact area; Tin(100u")min./Lead plating on terminal;
 Shields: Phosphor Bronze;
 Shields Plating: Tin(100u")min./Lead Over Nickel(40u")min.

2. Mechanical

Insertion Force: 35N max.
 Extraction Force: 10N min.
 Durability: 1500 cycles.
 USB Section Conforms to USB 2.0 Specification.

3. Electrical Specification

Rated Voltage and Current : 1.5A at 250V AC min;
 Contact Resistance: 30 Milliohms max.
 Insulation Resistance: 1000 megohms min At 500V DC.
 Dielectric Withstanding Voltage: 500 V AC For 1 minute.

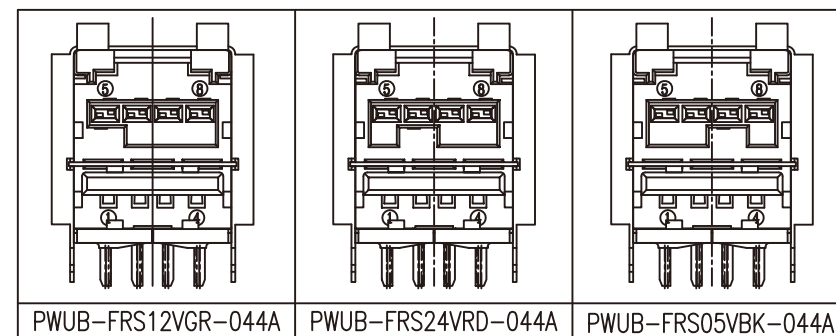

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1:1

DATE


SIZE A4

PPOJECTION

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±



ORDER INFORMATION

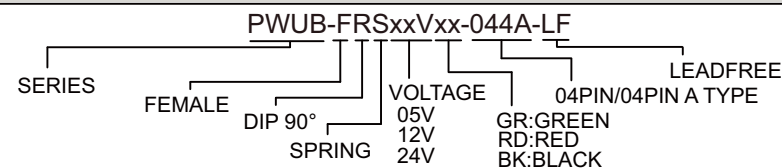

DESCRIPTION: USB+POWER SERIES