


1. MATERIAL :
- 1-1. HOUSING : NYLON46 UL94V-0;COLOR:SEE TABLE A
  - 1-2. CONTACT : PHOSPHOR BRONZE
  - 1-3. SHELL : BRASS
  - 1-4. SHRAPNEL : PHOSPHOR BRONZE
2. FINISH :
- 2-1. CONTACT : CONTACT AREA : 30u" MIN. GOLD PLATING  
SOLDER AREA : MATTE-TIN  
UNDER PLATE : 50u" MIN. NICKEL
  - 2-2. SHELL : 60u"~100u" NICKEL OVER ALL
  - 2-3. SHRAPNEL : 60u"~100u" NICKEL OVER ALL

PWUB-FRSxxxxyy-044A-LF

5V GR:GREEN LEADFREE  
12V RD:RED  
24V BK:BLACK

RoHS Compliant

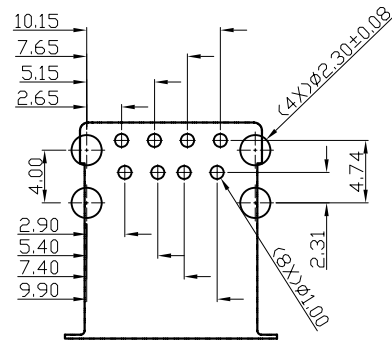

RECOMMENDED PCB DIMENSIONS  
-COMPONENT SIDE

<b>PWUB-FRS12VGR-044A</b> 12V(KEY POSITION1) HOUSING COLOR : <b>GREEN</b>	<b>PWUB-FRS24VRD-044A</b> 24V(KEY POSITION2) HOUSING COLOR : <b>RED</b>	<b>PWUB-FRS5VBK-044A</b> 5V(KEY POSITION3) HOUSING COLOR : <b>BLACK</b>

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

焯倫股份有限公司

PART NO. PWUB-FRSxxxxyy-044A		CHECKED BY CY	TOLERANCES ARE X. ± .XX ± 0.20 .XXX ± 0.10	DESCRIPTION:		
DWG NO. PWUB-FRSxxxxyy-044A						
FILE NO.		PROJECTION	AREA	REVISIONS	DATE	