



產品成型后與上蓋組裝尺寸

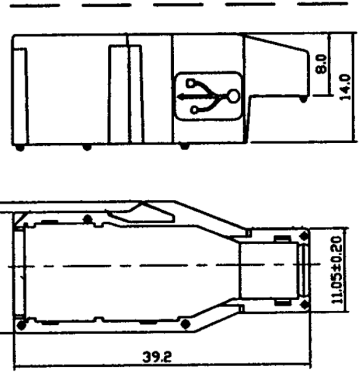

BOM:

項目	名稱	規格	電鍍(或顏色)	數量	備註
8	公頭護蓋	PE(高密度)	透明	1	
7	塑膠下蓋(新模)	ABS, UL94 V-0	SEE TABLE 1	1	
6	塑膠上蓋(新模)	ABS, UL94 V-0	SEE TABLE 1	1	
5	外殼下蓋	BRASS(H/2), T=0.30±0.02mm	吃錫鍊	1	
4	外殼上蓋	BRASS(H/2), T=0.30±0.02mm	吃錫鍊	1	
3	膠心(12V)	SEE TABLE 3	SEE TABLE 4	1	
2	PIN 2	BRASS(H), T=0.50±0.03mm	SEE TABLE 2	4	
1	PIN 1	BRASS(H), T=0.40±0.03mm	SEE TABLE 2	4	

組合圖

PWUB-MS12Vxx-044A-LF

LEADFREE
GE: GREY
BK: BLACK
WH: WHITE

RoHS Compliant

NOTE: All materials conform ROHS standard.
ELECTRICAL CHARACTERISTICS:
RATINGS: 3.0A
CONTACT RESISTANCE:
30mΩ Max.(Initial)
400mΩ Max.(After life test)
INSULATION RESISTANCE: 1000MΩ Min
DIELECTRIC STRENGTH: 750V AC/1 minute.
MECHANICAL: INSERTION FORCE: 6.6kgf MAX
WITHDRAWAL FORCE: 1.0kgf MIN

MORE THAN ALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. PWUB-MS12Vxx-044A

DWG NO. PWUB-MS12Vxx-044A

FILE NO.

UNIT / mm

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

- X. ±
- .X ±
- .XX ±
- .XXX ±
- ANG

DESCRIPTION:

AREA	REVISIONS	DATE