

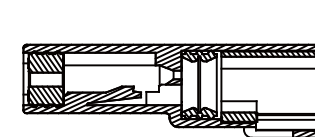
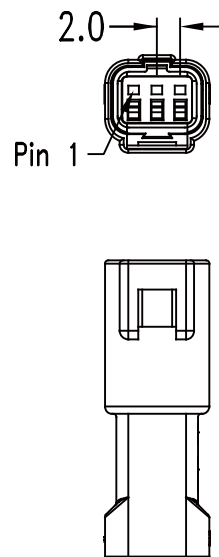
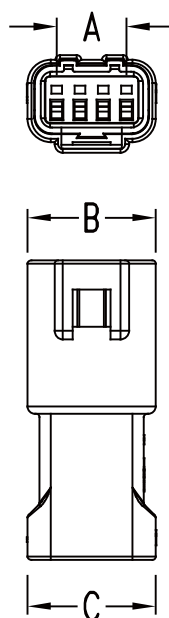




Features:

- 2 ~ 4 circuits available
- Body: PBT + 15%GF, White
- △ • Cover: PBT + 15%GF, Orange
- Waterproof ring: Oil silicone, Blue
- Waterproof plug: Oil silicone, Light blue
- Inner-housing lock construction
- Disconnectable crimp style
- △ • Waterproof grade: IPX7 of IEC 60529

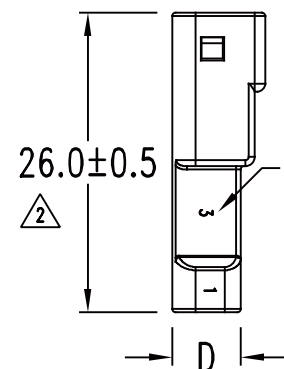


SEC. A-A



Logo

Specification:

- Current rating: 3A AC, DC (#22 AWG)
- △ • Voltage rating: 250V AC, DC
- △ • Insulation resistance: 1000MΩ Min.
- △ • Dielectric withstanding voltage: 1500V AC/minute
- △ • Ambient temperature range: -40°C ~ 105°C (Including temperature rise)

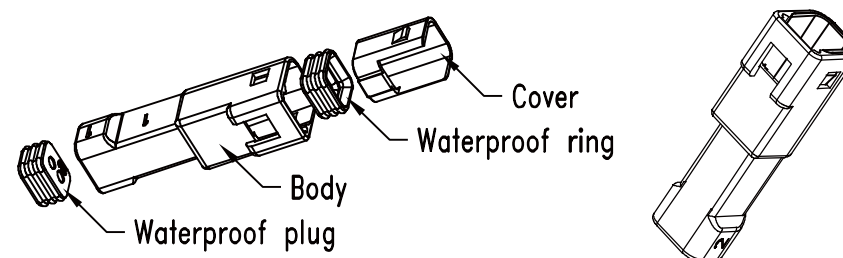

Dimensional Information (mm)

Circuits	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
2	2.0	7.0	7.0	5.9	8.1
3	4.0	9.0	9.0	5.9	8.4
4	6.0	11.0	11.0	5.9	8.4

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

Q02520-PHWH-1Xxx-LF

SERIES

MALE

WH:WHITE
HOUSING

LEADFREE

1X02:02 WAY

1X04:04 WAY

DESCRIPTION: .079"(2.0mm) Tab Housing