




SEC. A-A

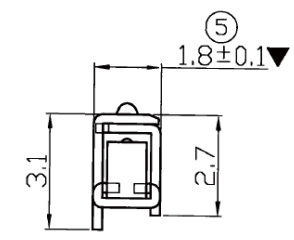

SEC. B-B

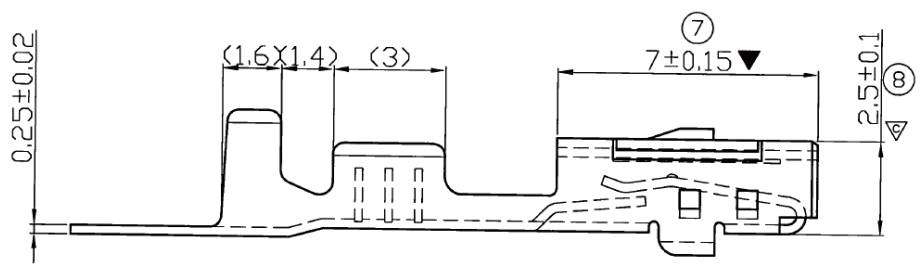

NOTES:

- 1. 插拔力:
 - 1.1 插入力: 0.1~0.6 KGF
 - 1.2 拔出力: 0.1~0.6 KGF
 - 2. 對手件: 040型 TAB=0.6
 - 3. 包裝數量: 4500 PCS/R
-
- 1. INSERTED/TENSILE FORCES:
 - 1.1 INSERTED FORCE: 0.1~0.6 KGF.
 - 1.2 TENSILE FORCE: 0.1~0.6 KGF.
 - 2. MATING PART: 040-TYPE TAB=0.6
 - 3. PACKING Q'TY: 4500 PCS/R

Q04022-FT-20	9.5	0.3~0.5	22~20	銅合金 COPPER ALLOYS	預鍍錫 PRE-TIN
PART NO. 編號	PITCH 間距	MM 線徑	AWG WIRE SIZE	MATERIAL 材質	FINISH 表面處理

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X.± .X± .XX± .XXX± ANG±
CHECKED BY GENIUS		
UNIT/mm	SCALE 1:1	
DATE		
SIZE A4	PJECTION	



ORDER INFORMATION

Q04022-FT-20-LF
 SERIES | | LEADFREE
 | | 20~22 AWG
 | | TERMINAL
 | | FEMALE

DESCRIPTION: