

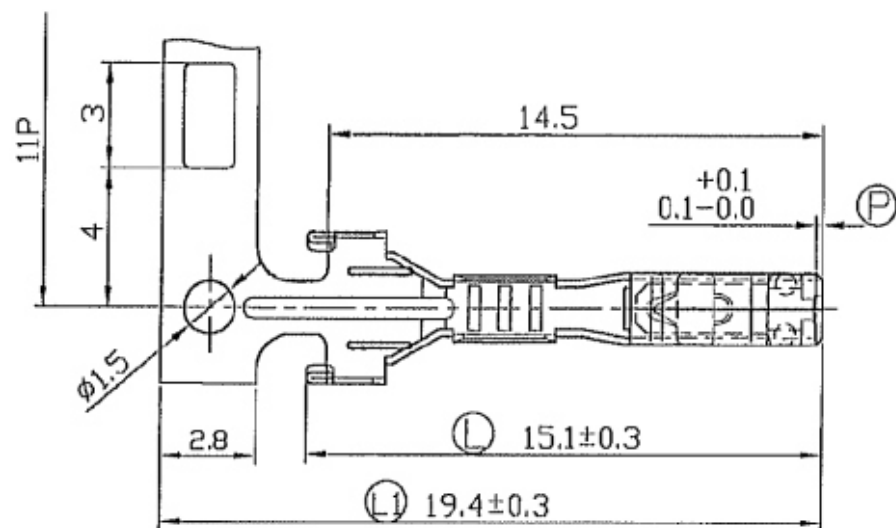



SEC A-A

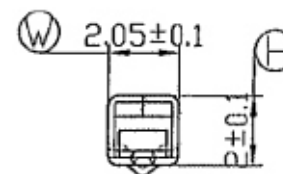

SEC B-B

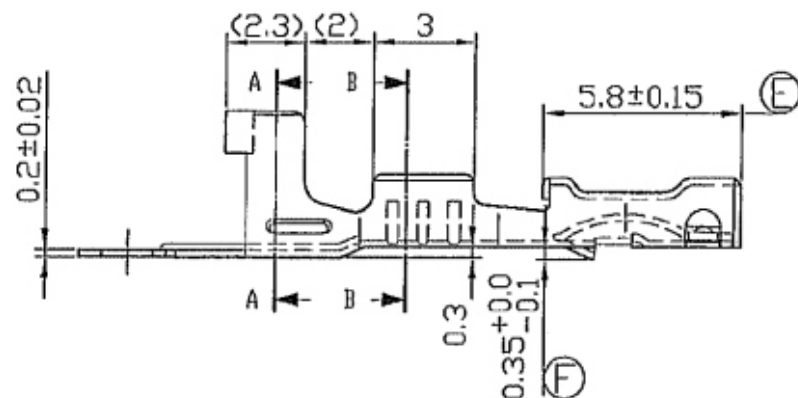

說明:

- 1.預鍍錫膜厚40u"以上。
- 2.對手件:060型 TAB=0.6。
- 插入力:0.1-0.6KG。
- 拉拔力:首回0.1-0.6KG。
- 10回0.1KG以上。

NOTE:

- 1.Pre-Tin Plated Thickness More Than 40u
- 2.Mating Part:
060-Type Tab=0.6
Inserted Force:0.1-0.6KG.
Tensile Force:
The first time 0.1-0.6KG.
The tenth time more than 0.1KG.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q060-FT-20-LF

SERIES T LEADFREE
20 AWG
TERMINAL
FEMALE

DESCRIPTION: