

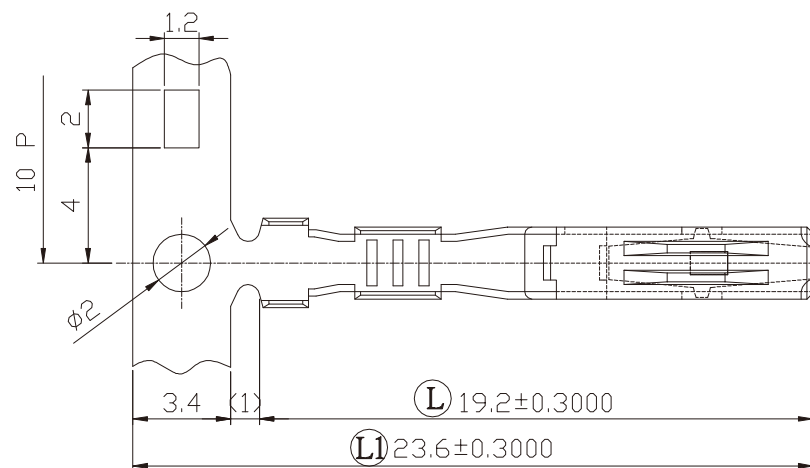



SEC.A-A

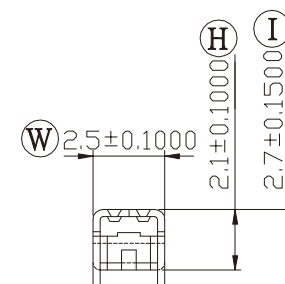

SEC.B-B

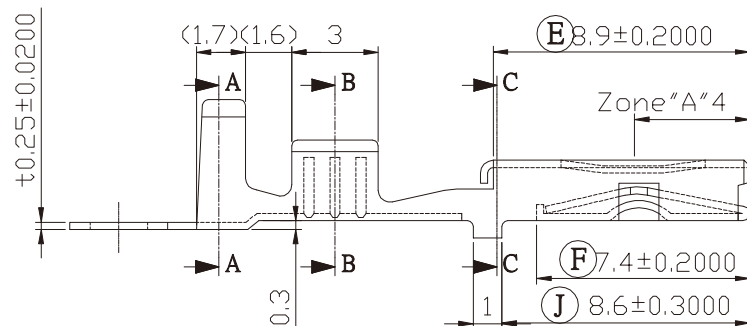

SEC.C-C

說明:

1. 預鍍錫膜厚40u"以上。
2. 對手件:060型 TAB=0.6
插入力:0.35-1.0kg。
拉拔力:0.35-0.7kg。

NOTE:

1. Pre-Tin Plated Thickness More Than 40u".
2. TAB=0.6
Inserted Force:0.35~1.0KG.
Tensile Force:0.35~0.7KG.

1	Copper Alloys	Note 1	0.85~1.25mm ²
NO.	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

Q060-FT19-18-LF

SERIES
LEADFREE
18 AWG
LONG 19.2mm
TERMINAL
FEMALE

DESCRIPTION: 060 TYPE FEMALE TERMINAL