
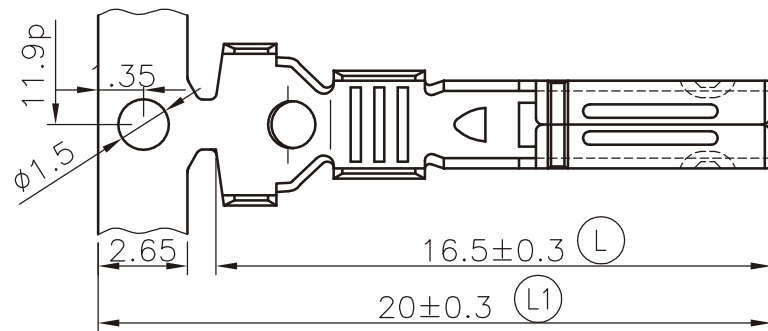



NOTE:

1. PRE-TIN PLATING THICKNESS MORE THAN 40u"
2. GOLD PLATING THICKNESS MORE THAN 3u"
3. MATING PART: TAB=0.8
INSERTED FORCE: 0.3 ~ 0.8kg
TENSILE FORCE: 0.3 ~ 0.8kg

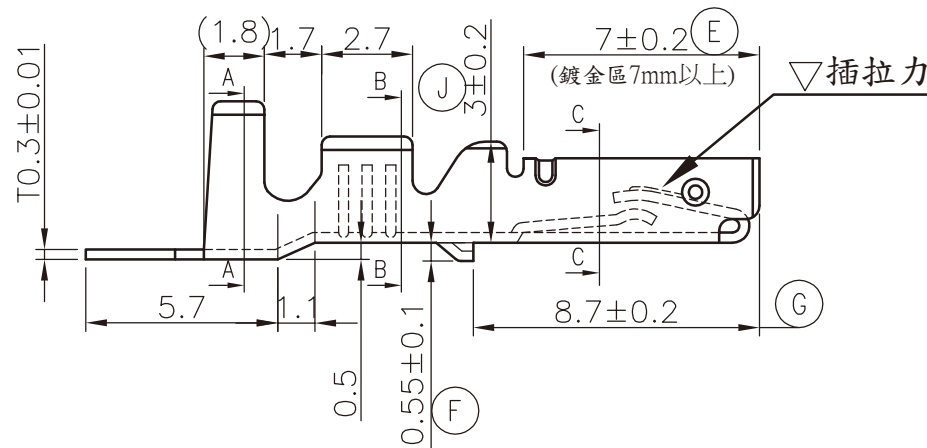

Phosphor bronze	Note 2	0.85~1.25MM ²
Brass	Note 1	0.85~1.25MM ²
Phosphor bronze	Note 1	0.85~1.25MM ²
Material	Surface Treatment	Wire Range

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

<1.0 : ± 0.10
1.0~5.0 : ± 0.15
5.0~10.0 : ± 0.20
10.0~20.0 : ± 0.25
20.0~45.0 : ± 0.30
>45.0 : ± 0.50
ANGLE : ± 2.0°

PPOJECTION

照片框

ORDER INFORMATION

Q06060-FT-16-LF

SERIES T T LEADFREE
16 AWG
TERMINAL
FEMALE

DESCRIPTION: