


SEC.A-A



SEC.B-B

說明:

- 1.預鍍錫膜厚40u"以上。
- 2.擇鍍金Zone"A"測厚區5u"以上。
- 3.對手件:070型TAB=0.6。
插入力:0.3~1.0KG。
拉拔力:0.4~0.8KG。
6回拉拔力:0.2KG以上。



NOTE:

- 1.Pre-Tin Plated Thickness More Than 40u".
- 2.Selective Gold Plating 5u" Over Zone"A"
- 3.Mating Part:070-TYPE Tab=0.6.
Inserted Force: 0.3~1.0KG.
Tensile Force: 0.4~0.8KG.
The First Time: The Sixth Time:More Than 0.2KG.

註:()表示參考尺寸,公差為一般公差的2倍

ATTENTION:THE () IS REFERENCE DIMENSION,

AND TOLERANCE IS THWICE FOR GENERAL TOLLENANCE

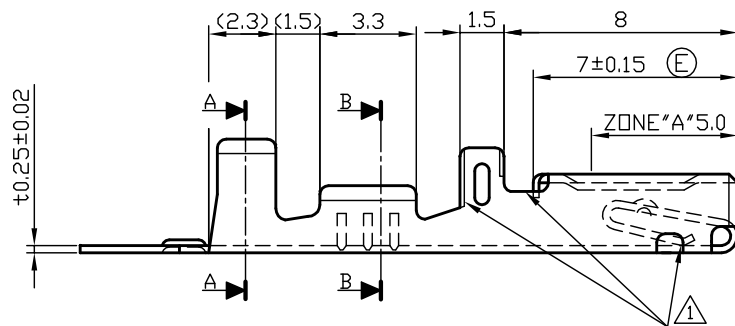

3	Brass	Note 1	0.3~0.5mm ²
2	Copper Alloys	Note 2	0.3~0.5mm ²
1	Copper Alloys	Note 1	0.3~0.5mm ²
NO.	材料 Material	表面處理 Surface Treatment	線徑 Wire Range

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

Q07035KS-FT-20-LF

SERIES

LEADFREE

20 AWG

TERMINAL

FEMALE

DESCRIPTION: 070 TYPE FEMALE TERMINAL