




SEC.A-A

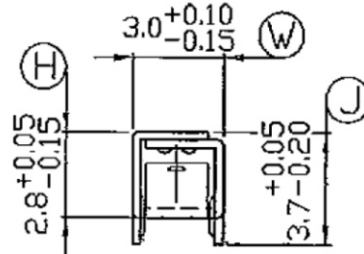

SEC.B-B

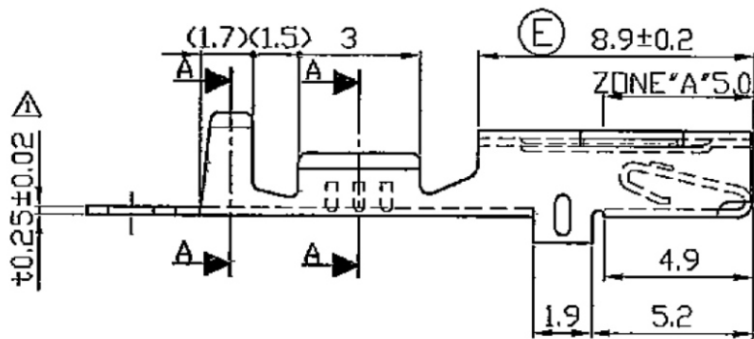

說明：

1. 擇鍍金Zone"A"鍍厚5u"以上
2. 預鍍錫膜厚40u"以上
3. 對手件:090型TAB=0.6
 插入力:0.3~0.6kg
 拉拔力:首回0.3~0.6kg
 10回0.15kg以上
 線徑:0.3~0.5mm²

NOTE :

1. Selective Gold Plating 5u" Over Zone"A"
2. Pre-Tin Plated Thickness More Than 40u"
3. Mating Part:090-Type Tab=0.6
 Inserted Force:0.3~0.6kg
 Tensile Force:The First Time 0.3~0.6kg
 The Tenth Time More Than 0.15kg

Q090-FT-20-LF
LEADFREE

RoHS Compliant



PART NO. Q090-FT-20		CHECKED BY CY		TOLERANCES ARE .X±0.2 .XX±0.1 .XXX± AWG	DESCRIP TION: 090 TYPE FEMALE TERMINAL
DWG NO. Q090-FT-20		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司