


NOTE:
1. MAXIMUM ELECTRICAL RATING:105°C 300 VOLTS
2. WIRE RANGE:22-16 AWG / 0.5-1.5 mm²

MATERIAL
INSULATION:VINYL
MATERIAL:BRASS
TIN PLATING

MAXIMUM ELECTRIC CURRENT							
A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.		NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	B	Q110-FT5V-16	0.5x2.8	3.2	6.4	18.5				0.25

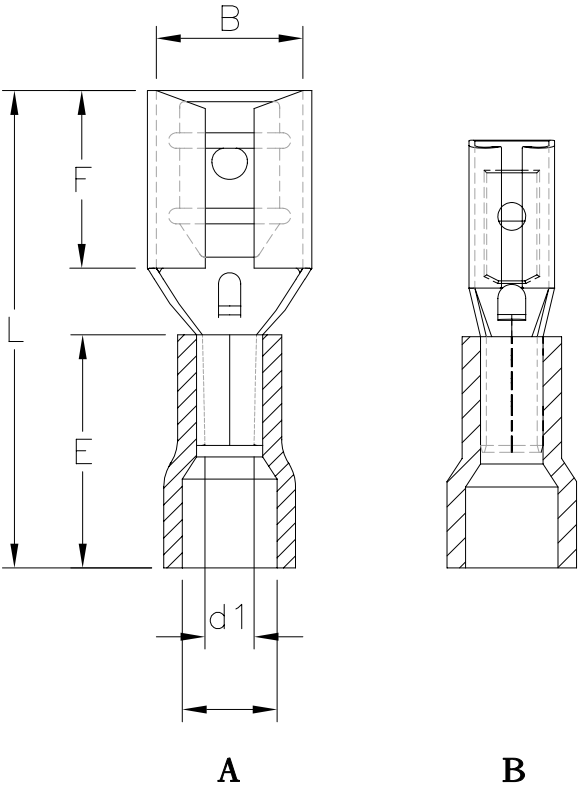

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1:1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION

煜倫股份有限公司

www.morethanall.com

照片框

ORDER INFORMATION

Q110-FT5V-16-LF

SERIES

TT

TT

TT

TT

TT

TT

TT

TT

LEADFREE

16-22AWG

VINYL

0.5mm TAB

TIN

FEMALE

DESCRIPTION: