

MATERIAL

INSULATION: NYLON

MATERIAL: BRASS

TIN PLATING

NOTE:

1. MAXIMUM ELECTRICAL RATING: 105°C 300 VOLTS

2. WIRE RANGE: 22-16 AWG / 0.5-1.5 mm²

INSULATED COLOR: RED

3. WIRE RANGE: 16-14 AWG / 1.5-2.5 mm²

INSULATED COLOR: BLUE


4. MATERIAL THICKNESS: t

TOLERANCE: ±0.05

MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	14	12	10
MAX AMP	3	4	7	10	15	20	24

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.		NEMA TAB	B ±0.20	F ±0.30	L ±1.50	E ±0.60	D ±0.50	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	B	Q110-FT5N-16	0.5x2.8	3.2	6.4	19.5	11.0	4.1	1.7	0.25
	B	Q110-FT8N-16	0.8x2.8	3.2	6.4	19.5				0.25
										0.35
										0.35
										0.4
										0.4
16-14 AWG 1.5-2.5 mm ²	B	Q110-FT5N-14	0.5x2.8	3.2	6.4	19.5	11.0	4.8	2.3	0.25
	B	Q110-FT8N-14	0.8x2.8	3.2	6.4	19.5				0.25
										0.35
										0.35
										0.4
										0.4

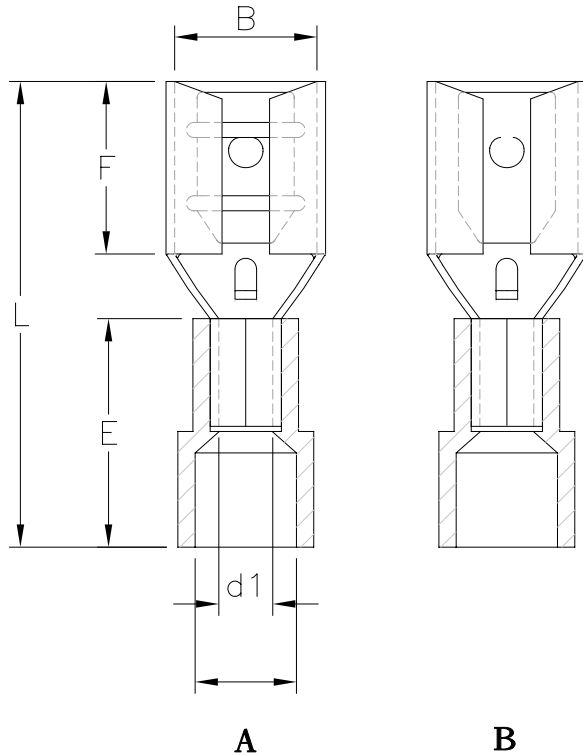

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

Q110-FTxN-xx-LF

SERIES T LEADFREE

16:16~22 AWG

14:14~16 AWG

FEMALE NYLON

TERMINAL 5:THICKNESS 0.5mm

8:THICKNESS 0.8mm

DESCRIPTION: