



MAXIMUM ELECTRIC CURRENT

A. W. G	22	20	18	16	
MAX AMP	3	4	7	10	

NOTE:

1. MAXIMUM ELECTRICAL RATING:105°C 300 VOLTS
2. WIRE RANGE:22-16 AWG / 0.5-1.5 mm²
INSULATED COLOR:RED
3. WIRE RANGE:16-14 AWG / 1.5-2.5 mm²
INSULATED COLOR:BLUE
4. MATERIAL THICKNESS:t
TOLERANC:±0.05

MATERIAL
INSULATION:NYLON
MATERIAL:BRASS
TIN PLATING

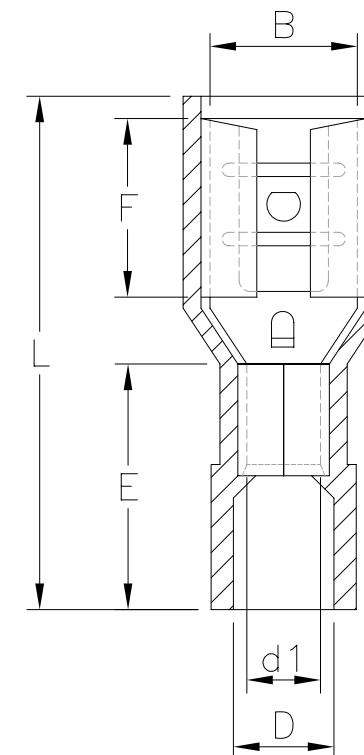

WIRE RANGE AWG/mm ²	產品編號 ITEM NO.	NEMA TAB	B ±0.20	F ±0.30	L ±1.00	E ±0.60	D ±0.30	d1 ±0.20	t
22-16 AWG 0.5-1.5 mm ²	Q110-FT5NFQ-16	0.5x2.8	3.2	6.4	19.0	10.5	4.2	1.7	0.25
	Q110-FT8NFQ-16	0.8x2.8	3.2	6.4	19.0	10.5	4.2	1.7	0.25

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

Q110-FTxNFQ-16-LF
SERIES T T T T T LEADFREE
FEMALE Q TYPE 16-22AWG
TERMINAL FULL
NYLON
5:0.5mm TAB
8:0.5mm TAB

DESCRIPTION: