




NOTE:

1. 表面處理
鍍錫 40u"以上

1.SURFACE TREATMENT:
TIN PLATING
THICKNESS MORE THAN 40u"

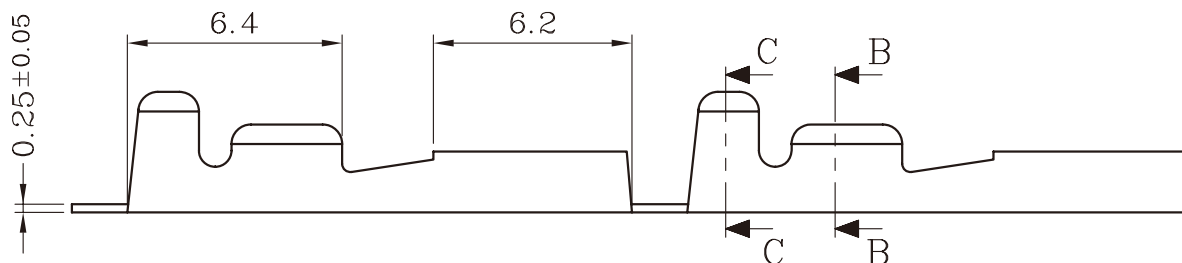

SEC. C-C



SEC. B-B

					材質 JIS2600EH MATERIAL	一般公差 GENERAL TOLERANCE	X :±0.5 X.X :±0.3 X.XX :±0.1	X.XXX :±0.05 ANGLES ±3°	比例 SCALE 4:1
△ 110 高腳		1.0~1.5kg	1.5~2.5kg	1.5~6.0kg	料厚 THICKNESS 0.25	包裝數量 PACKING Q'TY	12000 PCS/R	適用電線 WIRE RANGE	20~16
110 高腳		0.7~1.0kg	1.0~1.8kg	1.5~6.0kg	間距 PITCH 17.5	對手件 MATING PART	TAB:		
編號 PART NO.	處理 FINISH	A 點插入力 A INSERTED FORCE	插入力 INSERTED FORCE	拉拔力 TEASILE FORCE					

2.02	TAB: 0.8t	Q110-FT8-16	鍍錫 TIN PLATING
		Q110-FB8-16	素材 NONE
1.85	TAB: 0.5t	Q110-FT5-16	鍍錫 TIN PLATING
△		Q110-FB5-16	素材 NONE
DIM H	MATING PART	PART NO.	FINISH

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

Q110-Fxy-16-LF

SERIES T T LEADFREE
16~22 AWG
FEMALE 5:THICKNESS 0.5mm
8:THICKNESS 0.8mm
T:TIN
B:NONE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.30

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1:1

.XX ± 0.20

DATE

.XXX ± 0.10

ANG ± 1°

SIZE A4

PPOJECTION

DESCRIPTION: